Line Adaptor

VW-KM3E

SPECIFICATIONS

Power Source:	DC 12V
Power Consumption:	Approx. 0.4 watts
Television System:	CCIR: 625 lines, 50 fields PAL colour signal
Input Level:	Video: VIDEO IN connector (BNC) 1.0Vp-p, 75Ω terminated Audio: AUDIO IN connector (Phono jack) more than −10dB, 47kΩ
Weight:	120g
Dimensions:	100(W)×85(H)×27(D)mm

Weight and dimensions shown are approximate.
Specifications are subject to change without notice.

CONTENTS

1. CONTROLS AND COMPONENTS 1
2. CIRCUIT BOARD 1
3. SCHEMATIC DIAGRAM 1
4. EXPLODED VIEW 2

1. CONTROL AND COMPONENTS

Recording of TV Programs

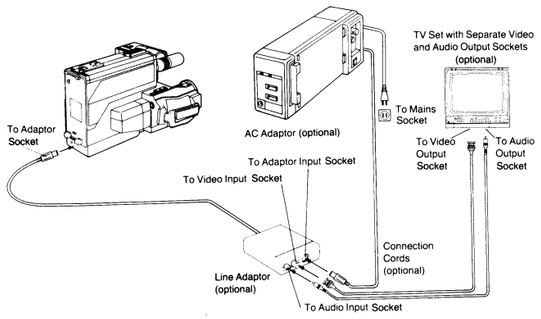
TV Set with Separate Video and Audio Output Sockets (optional)
To Mains Socket
To Adaptor Socket
AC Adaptor (optional)
To Video Output Socket
To Audio Output Socket
To Adaptor Input Socket
To Video Input Socket
Connection Cords (optional)
Line Adaptor (optional)
To Audio Input Socket

By connecting a TV set equipped with separate video and audio output jacks via the Line Adaptor (VW-KM3 optional) to the VHS Movie ,you can simultaneously record a program that is being received on the TV set.

Recording of another source instead of TV set as shown in above picture, if another source is connected, via Line Adaptor to NV-M3, recording of another source is possible.

Note:
When the Line Adaptor is being used, it is not possible to record sound via an external microphone.

2. CIRCUIT BOARD

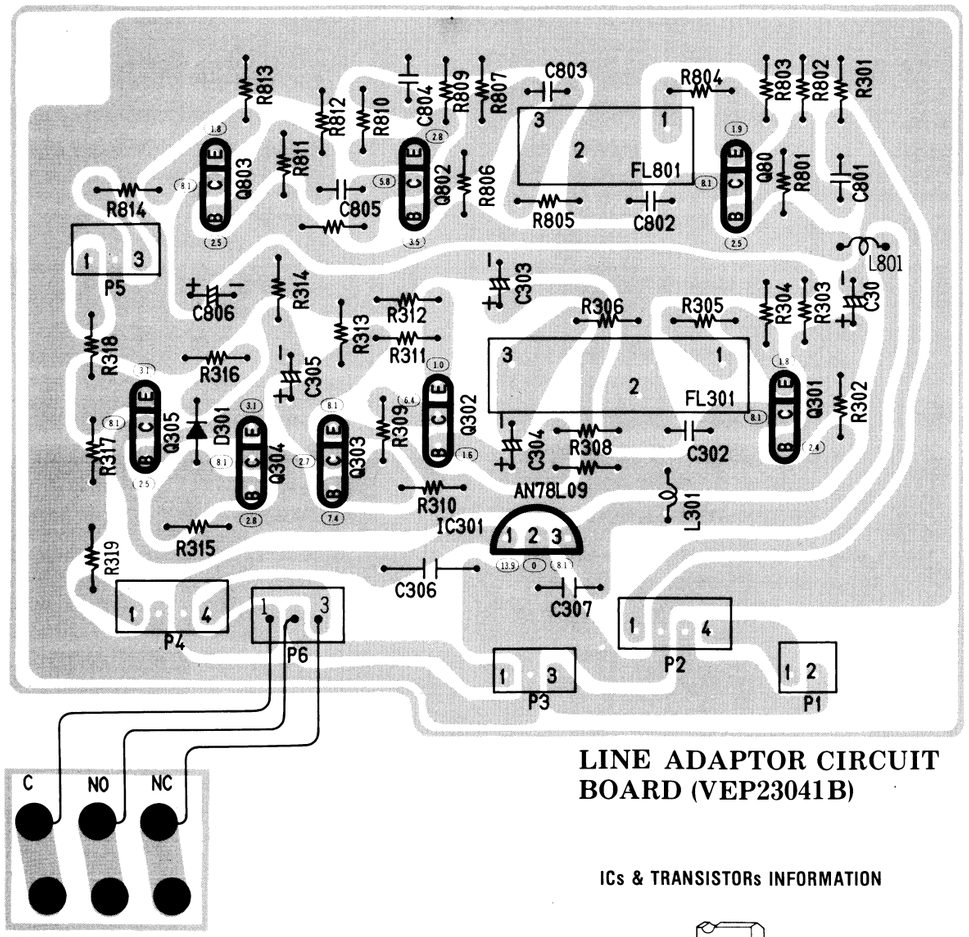

LINE ADAPTOR CIRCUIT BOARD (VEP23041B)

MICRO SW CIRCUIT BOARD (VJB20197)

ICs & TRANSISTORs INFORMATION



2SD636
2SC2206
2SB641

3. SCHEMATIC DIAGRAM

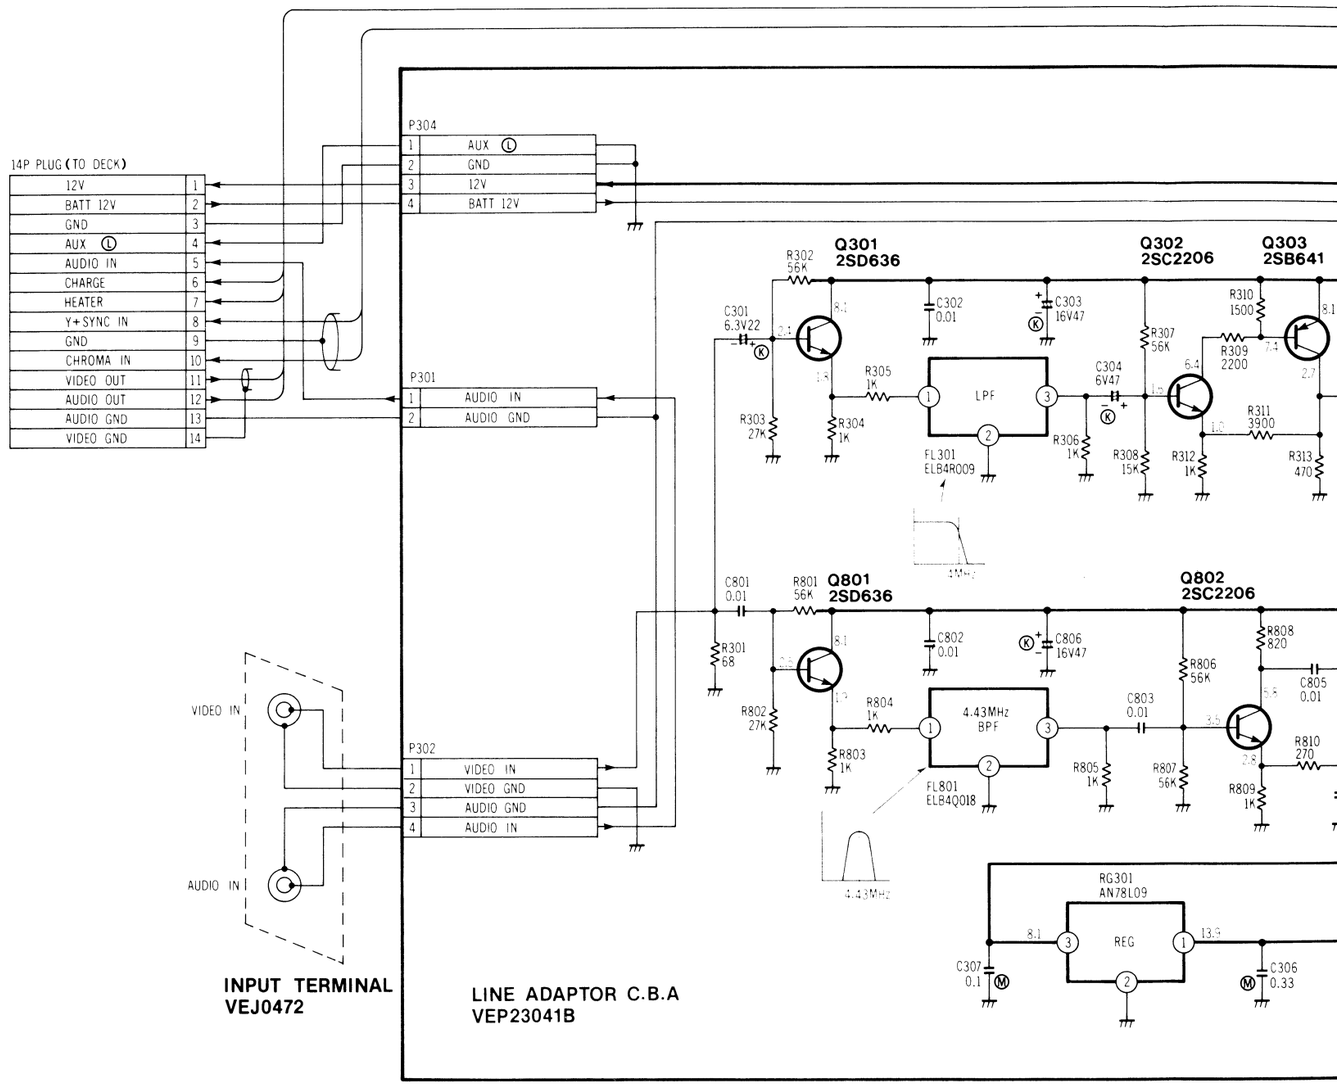

LINE ADAPTOR C.B.A
VEP23041B

NOTE : DO NOT USE THE PART NUMBER SHOWN ON THIS DRAWING FOR ORDERING. THE CORRECT PART NUMBER IS IN THE PARTS LIST. AND MAY BE SLIGHTLY DIFFERENT OR AMENDED SINCE THIS DRAWING WAS PREPARED

3. SCHEMATIC DIAGRAM

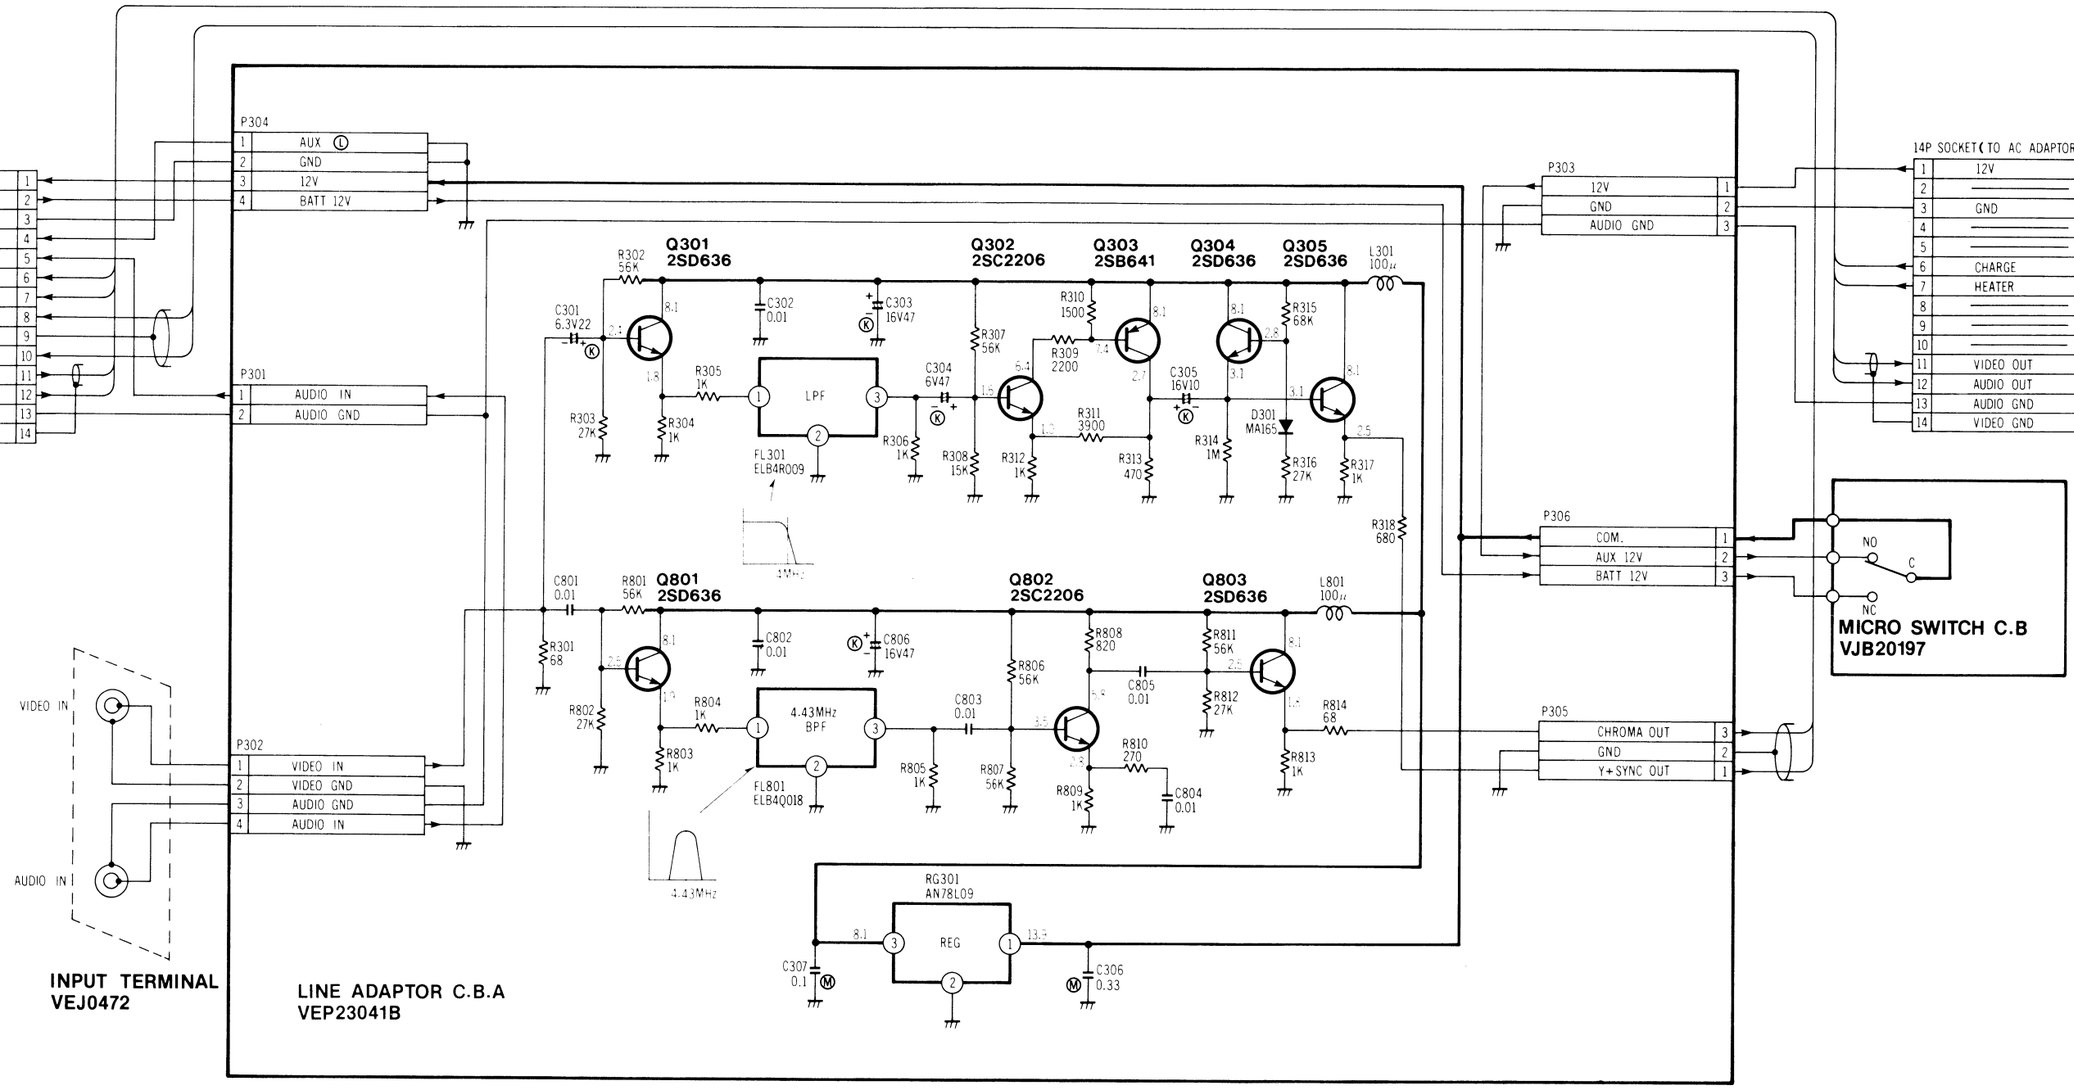

NOTE : DO NOT USE THE PART NUMBER SHOWN ON THIS DRAWING FOR ORDERING. THE CORRECT PART NUMBER IS SHOWN IN THE PARTS LIST, AND MAY BE SLIGHTLY DIFFERENT OR AMENDED SINCE THIS DRAWING WAS PREPARED.

NOTE : THE MEASUREMENT MODE OF THE DC VOLTAGE ON THIS DIAGRAM IS RECORD MODE WITH PAL COLOUR SIGNAL.

4. EXPLODED VIEW

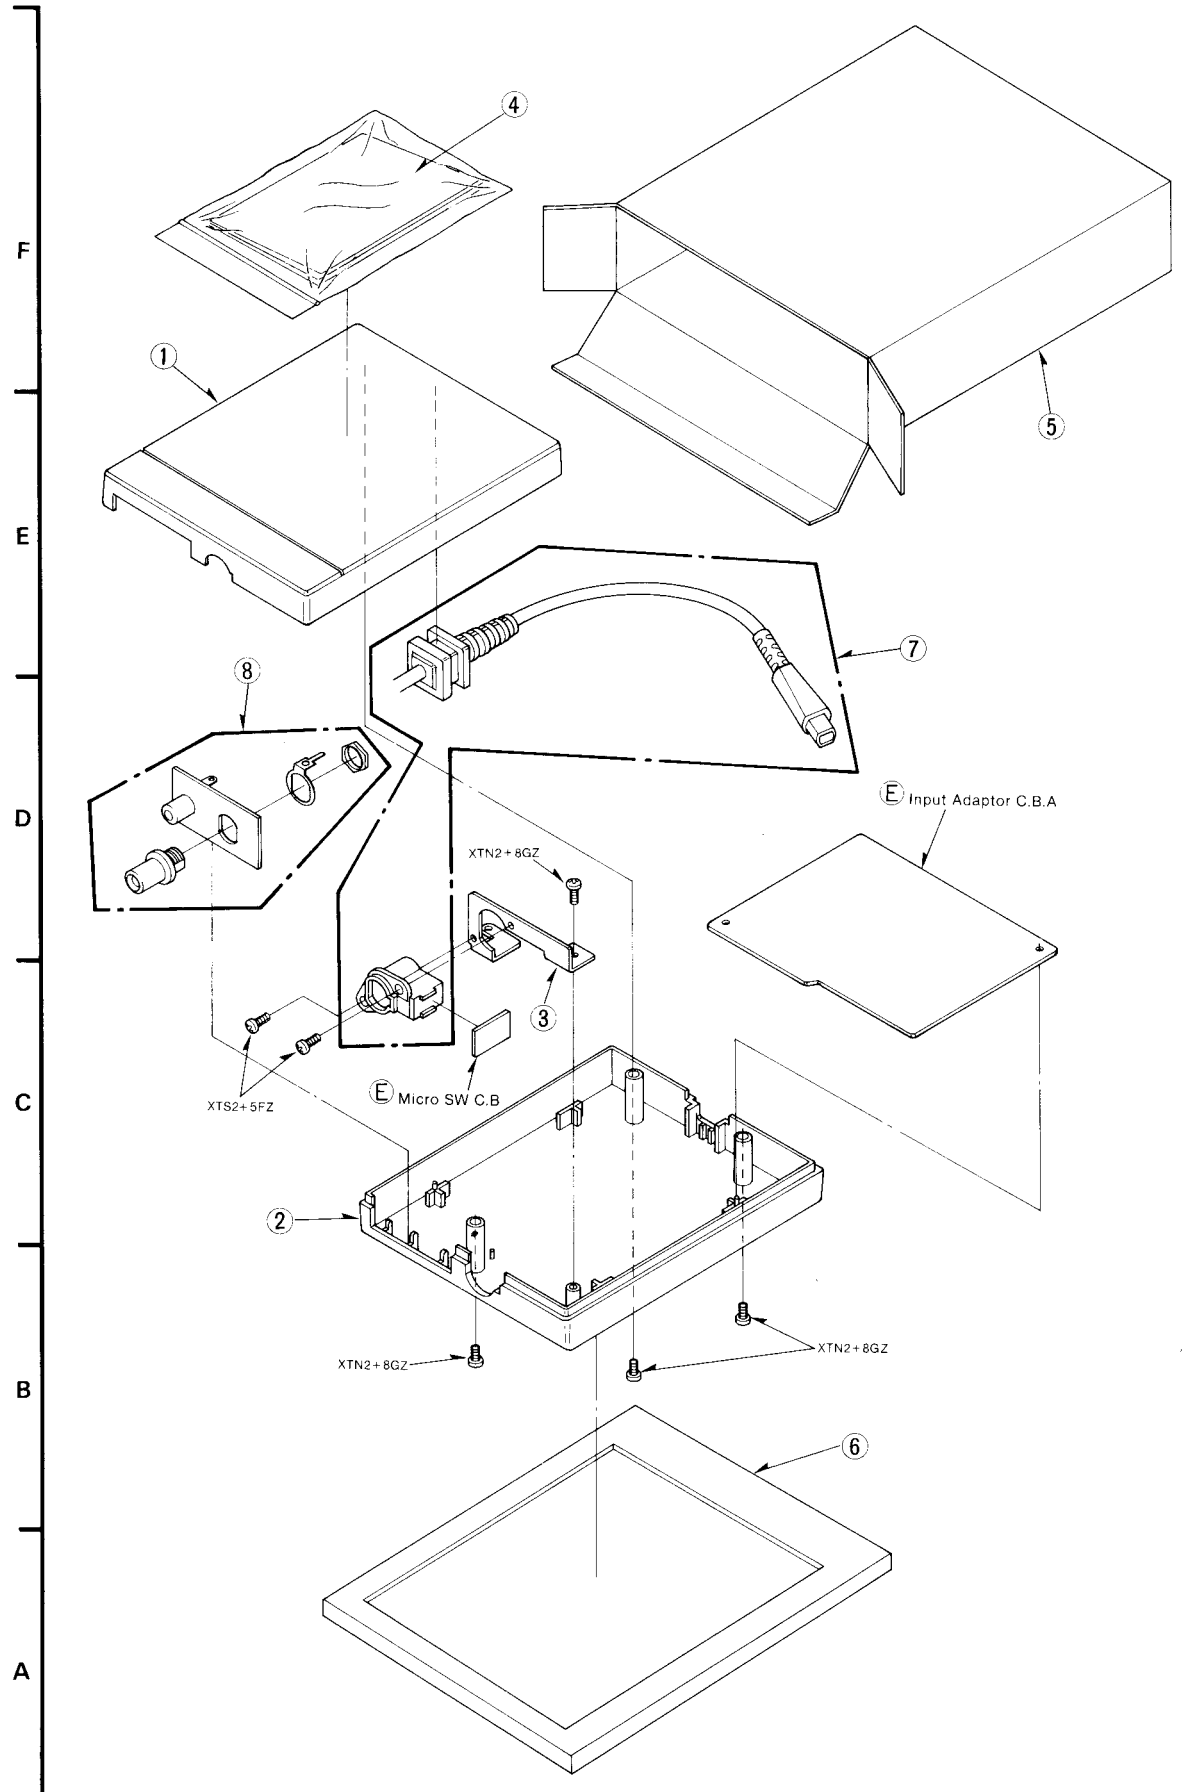

ORDER NO. VRD-8508-135A
(Date of issue : Sep. 1985)

PARTS LIST

MODEL NO: NV-M3E/EG/B, VW-KM3E

1. NV-M3E/EG/B Mechanical Replacement Parts List

* This parts list is detouchable from the manual.

Note:1.* Be sure to make your orders of replacement parts according to this list.
2.IMPORTANT SAFETY NOTICE
Components identified with the mark <!> have the special characteristics for safety. When replacing any of these components,use only the same type.

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
1(1)		VJF0171	Blind Piece	1	
2(1)		VDW0032	Lens Hood	1	
3(1)		VKF0608	Hood Cap	1	
4(1)		VKW0589	Coil Holder	1	
5(1)		VMK0253	Coil Shassis	1	
6(1)		VMP0764	Operation C.B.A. Support Angle	1	
7(1)		VYK1064	Front Case Unit	1	
8(1)		VGU2141	AWC Set Knob	1	
9(1)		VGU2142	Iris Knob	1	
10(1)		VXP0676	AF Lens Unit	1	<!>
11(1)		VEM0233	Zoom Motor Unit	1	
12(1)		VEK2598	Filter Unit	1	
13(1)		S4161	Pick-up Tube	1	
14(1)		ELY13A401W	Pick-up Tube Yoke	1	
15(1)		VMZ0647	Pick-up Tube Shield Plate	1	
16(1)		VSQ0434	Bias Light Unit	1	
17(1)		VEK2343	Pick-up Tube Socket Unit	1	
18(1)		VSC1481	Shield Plate	1	
19(1)		VMC0114	Yoke Earth Plate	1	
20(1)		VGQ0911	Strap	1	
21(1)		VDG0238	Idler Gear	1	
22(1)		VMS2891	Idler Gear Shaft	1	
23(1)		VDB0786	Master Flange Unit	1	
24(1)		VXL1361	Iris Unit	1	
25(1)		VXP0679	Lens Unit (A)	1	
26(1)		VGQ0857	Focus Rubber Cover	1	
27(1)		VKM0624	Top Holder	1	
28(1)		VMX0955	Wave Washer	1	
29(1)		VJF0326	Stopper	1	
30(2)		VKM0625	Bottom Holder	1	
31(1)		VMX0954	Tight Ring	1	
32(1)		VMX0956	Stopper Ring	1	
33(1)		VMS2980	Fixture Shaft	1	
34(1)		VMX0852	Fixture Ring	1	
35(2)		VYP1508	Front Panel Unit	1	
36(2)		VMG0345	Eye Cap	1	
37(2)		VYQ0012	Lens (B) Unit	1	<!>
38(2)		VMC0157	Lens Spring	1	
39(2)		VYK1153	Lens (A) Unit	1	<!>
40(2)		VKM0622	Top Case	1	
41(2)		VEK2452	CRT Socket Unit	1	
42(2)		VMG0339	CRT Fixing Rubber	1	
43(2)		VEK2481	Deflection Yoke Unit	1	
44(2)		M01JGU9WB	CRT	1	<!>
45(2)		VYK1154	Bottom Case Unit	1	
46(2)		VGD0892	Lens (A) Support Knob	1	
47(2)		VDL0045	Mirror	1	
48(2)		VYF0658	Wind Screen	1	
49(2)		VSV0010	Microphone	1	
50(2)		VMA6713	Mic Plate	1	
51(2)		VMA6708	Mic Angle	1	
52-1(2)		VJB04123	Circuit Board	1	
52-2(2)		VJJ0098	MIC/EAR Jack	1	
52-3(2)		VJP1245	Connector	1	
52-4(2)		ECEA0JK221	Capacitor 6.3V 220	1	
52-5(2)		ERDS2TJ221	Resistor 220	1	
52-6(2)		MA4705	Diode	1	
53(2)		VMA6693	CRT Masking	1	
54(2)		VXA2470	Insulator Unit	1	
55(2)		VJF0327	Shaft Holder	1	
56(3)		VEH0292	Upper Cylinder Unit	1	
57(3)		VJR0140	RT Terminal	1	
58(3)		VEG0406	Cylinder Unit	1	
59(3)		VDV0154	Loading Belt	1	
60(3)		VDG0204	Intermediate Pulley Gear	1	
61(3)		VMX0653	Cut washer	1	
62(3)		VDG0205	Drive Gear (A)	1	
63(3)		VDG0206	Drive Gear (B)	1	
64(3)		VDG0207	Drive Gear (C)	1	
65(3)		VXS0064	Earth Holder Unit	1	
66(3)		VDG0202	Cam Gear	1	
67(3)		VDG0211	Loading Gear (C) (2)	1	
68(3)		VMB1324	Loading Gear (C) Spring	1	
69(3)		VDG0210	Loading Gear (C) (1)	1	
70(3)		VMA6551	SG Limiter	1	
71(3)		VXP0632	Sector Gear Unit	1	
72(3)		VMD0698	Belt Cover	1	
73(3)		VDP0992	Main Pulley	1	
74(3)		VDV0155	Capstan Belt	1	
75(3)		VEK2372	Dew Sensor (1) Unit	1	
76(3)		VMA6757	Dew Sensor (2) Angle	1	
77(3)		VEK2361	Dew Sensor (2) Unit	1	
78(3)		VGQ0888	Cassette Opener	1	
79(3)		VXL1256	REW Arm (A) Unit	1	
80(3)		VXP0648	Take-up Clutch Unit	1	
81(3)		VXR0129	Take-up Reel Table	1	
82(3)		VXR0128	Supply Reel Table	1	
83(3)		VXP0647	Supply Clutch Unit	1	
84(3)		VMA6560	Safety Tab Switch Base	1	
85(3)		VSH0023	Safety Tab Switch	1	
86(3)		VXL1254	FF Arm (A) Unit	1	
87(3)		VXL1267	FF Arm (B) (1) Unit	1	
88(3)		VDP0993	REW Arm Kick Roller	1	
89(3)		VXZ0197	Soft Brake (T) Unit	1	
90(3)		VXP0637	Drive Gear Unit	1	
91(3)		VMD0716	Operation Frame	1	
92(3)		VMD0697	Gear Cover	1	
93(3)		VMX0388	Thrust Washer	3	
94(3)		VXL1261	Main Rod Unit	1	
95(3)		VXL1404	Dumper Gear Lever Unit	1	
96(3)		VSS0125	Mode Select Switch Unit	1	
97(3)		VEK2348	Capstan Stator Unit	1	<!>
98(3)		VXP0634	Capstan Rotor Unit	1	
99(3)		VXA2413	Cassette Up Unit	1	
100(3)		VDG0214	Dumper Unit	1	
101(3)		VMB1328	Pressing Spring	2	
102(3)		VSH0026	Leaf Switch	1	
103(3)		VJB00B70	Take-up Photo Tr. C.B.	1	
104(3)		VJB00B69	Supply Photo Tr.C.B.	1	
105(3)		PN158NV	Photo Tr.	2	
106(3)		VMD0606	Photo Holder (R)	1	
107(3)		VMD0607	Photo Holder (L)	1	
108(3)		VMD0710	Leaf Switch Cover	1	
109(3)		VMB1330	Board Spring	1	
110(3)		VMB1329	Holder (L) Spring	1	
111(3)		VMB1392	Holder (R) Spring	1	
112(3)		VMB1226	Lock Lever Spring (B)	1	
113(3)		VML1650	Lock Lever (B)	1	
114(3)		VMB1331	Lock Lever Spring (A)	1	
115(3)		VML1649	Lock Lever (A)	1	
116(3)		VXA2288	Lock Board Unit	1	
117(3)		VDP1000	Lock Roller	1	
118(3)		VMA6769	Dew Sensor (1) Angle	1	
119(3)		VML1707	Drive Arm Kick Lever	1	
120(3)		VMB1388	Drive Arm Kick Lever Spring	1	
121(3)		VMP0710	Hinge Angle	1	
122(3)		VKC0210	Hinge	1	
123(3)		VXA2434	Shield Unit	1	
124(4)		VXA2393	Supporter Unit	1	
125(4)		VXA2392	Brake Plate (1) Unit	1	
126(4)		VHN0047	M2 Nylon Nut	3	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
127(4)		VDP1033	P1 Roller	1	
128(4)		VMA6547	P1 Limiter Plate	1	
129(4)		VMB1327	P1 Post Spring	1	
130(4)		VXA2215	P1 Base (1) Unit	1	
131(4)		VEM0240	Loading Motor Unit	1	<!>
132(3)		VXA2350	Frame (1) Angle Unit	1	
133(4)		VKC0248	Audio Support Angle	1	
134(4)		VBS0021	FE Head	1	
135(4)		VMD0694	FE Head Base	1	
136(4)		VMD0707	Tension Adjust Piece	1	
137(4)		VXL1262	Tension Arm Unit	1	
138(4)		VML1641	Band Release Arm	1	
139(4)		VXZ0199	Tension Band Unit	1	
140(4)		VMB1315	Tension Spring	1	
141(4)		VXL1264	Soft Brake Lever (S) Unit	1	
142(4)		VMB1314	Soft Brake Lever Spring	1	
143(4)		VDG0208	Loading (A) Gear	1	
144(4)		VDG0209	Loading (B) Gear	1	
145(4)		VXL1251	Tension Kick Lever Unit	1	
146(4)		VXL1275	Eject Lever (A) Unit	1	
147(4)		VXL1276	Eject Lever (B) Unit	1	
148(4)		VMA6542	P2 Adjust Plate	1	
149(4)		VMD0701	Supply Post Stopper	1	
150(4)		VMD0699	V Stopper Base	1	
151(4)		VMD0700	Take-up Post Stopper	1	
152(4)		VMD0721	Loading Guide S1	1	
153(4)		VMD0722	Loading Guide S2	1	
154(4)		VMD0769	Tape Protector	1	
155(4)		VXA2221	Supply Shaft Holder (1)	1	
			Unit		
156(4)		VZJ0036C	Roller Post (S) Unit	1	
157(4)		VXA2231	Connection Tie Unit	1	
158(4)		VXA2256	Supply Shaft Holder	1	
			Angle Unit		
159(4)		VMM0144	Connection Rod	1	
160(4)		VMA6546	Take-up Shaft Holder Angle	1	
161(4)		VXA2360	T Shaft Holder Unit	1	
162(4)		VXA2257	Loading Guide T Unit	1	
163(4)		VMX0784	Ring Guide Sleeve Unit	3	
164(4)		VDP0996	Ring Guide Roller	3	
165(4)		VMS2692	Ring Guide Sleeve (L)	3	
166(4)		VMB1319	Loading Spring	2	
167(4)		VXA2253	Loading Ring S (1) Unit	1	
168(4)		VXA2223	Loading Ring T (1) Unit	1	
169(4)		VXA2232	Loading Rink T Unit	1	
170(4)		VXL1270	Ring Pressure Arm (1) Unit	1	
171(4)		VMB1323	Ring Pressure Arm Spring	1	
172(4)		VMD0713	Tape Cover (A)	1	
173(4)		VMA6552	Chassis Shield Panel	1	
174(4)		VXZ0206	Brake (L) Unit	1	
175(4)		VXZ0207	Brake (R) Unit	1	
176(4)		VMX0876	P1 Collar	1	
177(4)		VMA6694	LED Angle	1	
178(4)		VMS2888	Post Sleeve (B)	1	
179(4)		VMS2693	P4 Post Sleeve	1	
180(4)		VMS2694	P5 Post Sleeve	1	
181(4)		VMB1322	P4/P5 Spring	2	
182(4)		VHD0144	A/C Head Adjust Screw	1	
183(4)		VMB1321	A/C Head Adjust Spring	1	
184(4)		VBR0087	A/C Head	1	
185(4)		VHN0023	M3 Nylon Nut	1	
186(4)		VML1637	A/C Head Arm	1	
187(4)		VMB1320	A/C Height Spring	1	
188(4)		VXL1265	Pinch Roller Pressure	1	
			Arm Unit		
189(4)		VXL1249	Pinch Roller pressure	1	
			Arm (C) Unit		
190(4)		VMB1326	Pinch Roller Spring	1	
			Pressure		
191(4)		VMB1318	REW Arm Spring	1	
192(4)		VXL1269	REW Arm Base (1) Unit	1	
193(4)		VDP0993	REW Arm Kick Roller	1	
194(4)		VML1640	Pinch Lever	1	
195(4)		VMB1325	Pinch Lever Spring	1	
196(4)		VXL1329	Pressure Roller Lever (1)	1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
			Unit		
197(4)		VGQ0842	F2 Cap	1	
198(4)		VMA6695	LED Angle (B)	1	
199(4)		VXD0098	Thrust Bearing	1	
200(4)		VXD0093	Capstan Housing Unit	1	
201(4)		VMX0775	Dust Seal	1	
202(4)		VHD0204	Adjust Screw	2	
203(4)		VHN0039	Adjust Nut	1	
204(4)		VXJ0036A	Roller Post (T) Unit	1	
205(4)		VXL1327	Pressure Lever Unit	1	
206(4)		VMB1393	Pressure Lever Spring	1	
207(5)		VKC0237	Door Hinge (L)	1	
208(5)		VKF0607	Operation Door	1	
209(5)		VKC0236	Door Hinge (R)	1	
210(5)		VYK1116	Bottom Case Unit	1	
211(5)		VKC0211	Door Support Piece (L)	1	
212(5)		VKC0202	Door Support Piece (R)	1	
213(5)		VHD0184	Shoe Screw	1	
214(5)		VMC0116	Shoe Spring	1	
215(5)		VGQ0862	Shoe Support Piece	1	
216(5)		VMA6562	Shoe	1	
217(5)		VYH0071	Grip Case (1) Unit	1	
218(5)		VMP0788	Belt Angle	1	
219(5)		VGU2127	Battery Stopper Knob	1	
220(5)		VGQ0802	Battery Stopper	1	
221(5)		VMB1359	Battery Stopper Spring	1	
222(5)		VMA6601	Battery Stopper Support	1	
			Angle		
223(5)		VKF0577	Battery Support Plate	1	
224(5)		VJF0267	Battery Catcher	1	
225(5)		VMP0554	E.V.F. Support Angle	1	
226(5)		VMA6678	Gear Cover	1	
227(5)		VJF0285	Clamp	1	
228(5)		VKF0614	Grip Separate Piece	1	
229(5)		VMP0675	Battery Angle	1	
230(5)		VMZ0735	Barrier (B)	1	
231(5)		VMD0717	Multi Connector Frame	1	
232(5)		VMP0595	Board Support Angle (A)	1	
233(5)		VXK0731	Frame (3) Unit	1	
234(5)		VEK2562	Multi Connector Unit	1	
235(5)		XBA2C20TB0	Fuse 2.0A/250V	1	<!>
236(5)		VXU0543	Eject Button Unit	1	
237(5)		VXU0437	Operation Board Unit	1	
238(5)		VGU2430	Tracking Knob	1	
239(5)		VYK1191	Top Case Unit	1	
241(5)		VGP1281	Cassette Cover	1	
242(5)		VMG0332	Cassette Cover Cap	2	
243(5)		VMP0792	Belt Holder	1	
244(5)		VGU2524	Power Button	1	
245(5)		VXU0580	Power/Stand-by Button Angle	1	
246(5)		VMD0714	Tape Cover (B)	1	
247(5)		VGQ0864	Zoom Switch Holder	1	
248(5)		VGU2367	Zoom Switch Cover	1	
249(5)		VYC0120	Grip Belt Unit	1	
250(5)		VGQ0787	Grip Belt Hook	1	
251(5)		VGF0166	Hook Cover	1	
252(5)		VGH0768	Operation Plate	1	
253(5)		VJF0290	Clamp	1	
254(5)		VKF0613	Adjust Cap	1	
255(5)		VMB1359	Power Botton Spring	1	
256(5)		VMP0793	Handle Fixture Angle	1	
260(6)		VQF1610	Fan Bag Kit	1	NV-M3EG
260(6)		VQF1611	Fan Bag Kit	1	NV-M3E
260(6)		VQF1612	Fan Bag Kit	1	NV-M3B
261(6)		VPN1314	Cushion (Top)	1	
262(6)		VPN1315	Cushion (Buttom)	1	
263(6)		VPG2387	Packing Case	1	NV-M3EG
263(6)		VPG2388	Packing Case	1	NV-M3E
263(6)		VPG2389	Packing Case	1	NV-M3B
270(6)		VYH0053	Handle Unit	1	
272(6)		VSQ0443	AV Connector	1	
273(6)		VBE0005	Earphone	1	
274(6)		VPK0524	Accessory Case	1	
275(6)		VPN1249	Top Pad	1	
300(2)		VMX0941	Washer	1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
301(2)		VMX0942	Wave Washer	1	
302(4)		VJB00E64	A/C Head C.B.	1	
303(5)		VMZ0690	Barrier (C)	1	
304(4)		VJB00E41	Sensor LED C.B.	1	
305(4)		VMD0465	LED Holder	1	
306(4)		LN59NV	Sensor LED	1	
307(1)		VDW0028	Encoder Cover	1	
308(1)		VEK2534	Sliding Unit	1	
309(1)		VGQ0859	AF Lens Cover	1	
310(1)		VMP0762	Lens Angle (1)	1	
311(1)		VJF0312	LED Lead Wire Holder	1	
312(1)		VXA2401	LED Adjust Unit	1	
313(1)		VMP0761	Nut Plate	1	
314(1)		VMP0757	C.B Support Angle	1	
315(1)		VMP0763	Lens Angle (2)	1	
316(1)		VEM0238	Focus Motor	1	
317(1)		VMX0884	Motor Spacer	2	
318(1)		VMX0815	Motor Spacer	1	
319(1)		VJF0313	PSD Lead Wire Holder	1	
320(1)		VJF0305	PSD Holder	1	
321(1)		VXA2400	Sensor Adjust Unit	1	
322(1)		VXP0677	Sensor Lens Unit	1	
323(1)		VJF0316	Encoder Lead Wire Holder	1	
324(1)		VGU2497	AWT SET Switch	1	
325(1)		VGU2494	AF/MF SW Knob	1	
326(2)		VMC0156	Brake Spring	1	
			Screws		
400(5)		VHD0213		3	
401(1)		VHD0230		2	
402(1)		VHD0233		2	
403(1)		VHD0234		3	
404(1)		VHD0235		4	
405(1)		VHD0238		4	
406(1)		VHD0239		4	
407(1)		VHD0240		3	
408(1)		VHD0241		4	
409(1)		VHD0243		2	
410(1)		VHD0244		2	
411(1)		VHD0246		2	
			JIG		
		VFK0302	9Pin Connection Cable	1	
		VFK0303	Camera Holder	1	
		VFK0304	Y/C Separator	1	
		VFK0312	10Pin Connection Cable	1	
		VFK0305	Hex. Wrench (0.71mm)	1	
		VFJ8125H3F	VHS Alignment Tape	1	
		VFK0144	Retaining Ring Remover	1	
			3(mm)		
		VFK0191	Post Adjustment Plate	1	
		VFK0190	Reel Table Height Jig	1	
		VFK0189	H-Position Adj-Fixture	1	
		VFK0137	Post Adjustment	1	
			Screwdriver		
		VFK0157	Fine Adjustment	1	
			Screwdriver		
		VFK0133	Dial Torque Gauge	1	
		VFK0134	Adaptor for VFK0133	1	
		VFK0180	(plastic clamper only)	1	
		VFK66	Fan Type Tension Gauge	1	
		VFK27	Head cleaning stick	1	
		MOR265	Morlytone Grease	1	
		VFK0283	Service Alignment Tool Kit	1	

2. NV-M3E/EG/B Electrical Replacement Parts List

Note:1.* Be sure to make your orders of replacement parts according to this list.
2. IMPORTANT SAFETY NOTICE
Components identified with the mark <!> have the special characteristics for safety. When replacing any of these components,use only the same type.
3.Unless otherwise specified,
All resistors are in OHMS ,K=1,000 OHMS. All capacitors are in MICRO-FARADS(uf),P=uuF.
4.The P.C.Board units marked width'■'show below the main assembled parts.

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
		VEP25007A	PRE AMP C.B.A.	1	
		VEP23042A	CAMERA MAIN C.B.A.	1	<!>
		VEP23043A	SUNC SUB C.B.A.	1	
		VEP20187A	CAMERA SENSOR C.B.A.	1	
		VEP26041A	CAMERA OPERATION C.B.A.	1	
		VEP20188A	ZOOM C.B.A.	1	
		VEP00F17C	E.V.F. C.B.A.	1	
		VEP00F18C	HIGH VOLTAGE C.B.A.	1	
		VJB00F19	CONNECTOR C.B.	1	
		VJB00F20	LED C.B.	1	
		VEP00F61A	AUTO FOCUS C.B.A.	1	
		VJB26044	AUTO FOCUS SW C.B.	1	
		VJB20184	IR LED C.B.	1	
		VJB20183	PSD C.B.	1	
		VEP06336A	MAIN C.B.A.	1	
			(POWER, SERVO, SYSTEM		
			CONTROL)		
		VEP03297A	LUMINANCE/CHROMINANCE	1	
			C.B.A.		
		VEP05073B	HEAD AMP C.B.A.	1	
		VEP04131B	AUDIO C.B.A.	1	
		VEP06311A	OPERATION (I) C.B.A.	1	
		VEP06312A	OPERATION (II) C.B.A.	1	
		VEP06314A	OPERATION (III) C.B.A.	1	
		VJB00F03	MICRO SW C.B.	1	
		VJB00E39	EJECT C.B.	1	
		VJB00G18	FUSE CONNECTION C.B.	1	
		VJB26042	START/STOP C.B.	1	
		VJB00F70	MECHANISM CONNECTION C.B.	1	
		VJB00F71	FE HEAD C.B.	1	
		VJB00F66	REMOTE CONTROL JACK C.B.	1	
		VSC1570	SHIELD CASE	1	(FOR AUDIO)
		VSC1571	SHIELD CASE	1	(FOR AUDIO)

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
		VKC0248	SHIELD CASE HING	1	(FOR AUDIO)
		VSC1354	SHIELD CASE	1	(FOR HEAD AMP)
		VSC1355	SHIELD CASE	1	(FOR HEAD AMP)
		VSC1538	SHIELD PLATE	1	(FOR HEAD AMP)
		VSC1569	SHIELD PLATE	1	(FOR HEAD AMP)
		VMZ0664	BARRIER	1	(FOR HEAD AMP)
		VMZ0736	SHIELD CASE BARRIER	1	(FOR HEAD AMP)
	■	VEP25007A	PRE AMP C.B.A.		
			TRANSISTORS		
Q101		2SD601		1	(Q)
Q102		2SA1022		1	(C)
Q103		2SC2404		1	(C)
Q104		2SA1022		1	(C)
Q105		2SK316		1	(P)
			DIODES		
D101		MA151K		1	
D102		MA151K		1	
			RESISTORS		
R101		ERJ6GCYJ224	CHIP 220K	1	
R102		ERJ6GCYJ102	CHIP 1K	1	
R103		ERJ6GCYJ122	CHIP 1.2K	1	
R104		ERJ6GCYJ221	CHIP 220	1	
R105		ERJ6GCYJ104	CHIP 100K	1	
R106		ERJ6GCYJ822	CHIP 8.2K	1	
R107		ERJ6GCYJ124	CHIP 120K	1	
R108		ERJ6GCYJ273	CHIP 27K	1	
R109		ERJ6GCYJ151	CHIP 150	1	
R110		ERJ6GCYJ102	CHIP 1K	1	
R111		ERJ6GCYJ152	CHIP 1.5K	1	
R112		ERJ6GCYJ562	CHIP 5.6K	1	
R113		ERJ6GCYJ101	CHIP 100	1	
R114		ERJ6GCYJ471	CHIP 470	1	
R115		ERO50CKG2704	2.7M	1	
R116		ERJ6GCYK565	CHIP 56M	1	
			CAPACITORS		
C101		ECUX1H473ZFN	CERAMIC 50V 0.04	1	
C102		ECSF1CE476	TANTALUM 16V 47	1	
C103		ECRJA050M11	TRIMER 50P	1	
C105		ECUX1H010DN	CERAMIC 50V 1P	1	
C106		ECSF0JE475	TANTALUM 6.3V 4.7	1	
C107		ECSF1AE335	TANTALUM 10V 3.3	1	
C108		ECSF1AE335	TANTALUM 10V 3.3	1	
C109		ECSF0JE475	TANTALUM 6.3V 4.7	1	
C110		ECSF0JE476	TANTALUM 6.3V 4.7	1	
C111		ECUX1H473ZFN	CERAMIC 50V 0.04	1	
			COILS		
L101		VLQ0163K330	33uH	1	
L102		VLQ0164	360uH	1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
	■	VEP23042A	CAMERA MAIN C.B.A.		
			INTEGRATED CIRCUITS		
IC201		NJM3414M		1	
IC202		AN2110S		1	
IC301		AN2310S		1	
IC302		AN2320S		1	
IC303		AN2360S		1	
IC304		AN2210S		1	
IC401		AN2431		1	
IC402		MN8037S		1	
IC403		AN6552S		1	
IC601		NJM4556MB		1	
IC602		NJM4558M		1	
IC901		uPD7507G613		1	
IC902		AN6912S		1	
			TRANSISTORS		
Q301		2SD601		1	
Q302		2SB709		1	
Q303		2SC2404		1	
Q304		2SD601		1	
Q305		2SD601		1	
Q306		2SD601		1	
Q307		2SD601		1	
Q308		2SD601		1	
Q309		2SD601		1	
Q310		2SA1022		1	
Q311		2SD601		1	
Q312		2SD601		1	
Q313		2SD601		1	
Q314		2SD601		1	
Q315		2SB709		1	
Q401		2SC2404		1	
Q402		2SC2404		1	
Q403		2SD601		1	
Q404		2SC2404		1	
Q405		2SC2404		1	
Q406		2SD601		1	
Q407		2SD601		1	
Q408		2SD601		1	
Q409		2SD601		1	
Q410		2SD601		1	
Q411		2SD601		1	
Q412		2SD601		1	
Q413		2SD601		1	
Q414		2SD601		1	
Q415		2SD601		1	
Q601		2SB819		1	
Q602		2SD601		1	
Q603		2SD601		1	
Q604		2SD601		1	
Q605		2SD1051		1	
Q606		2SD601		1	
Q607		2SD601		1	
Q608		2SD601		1	
Q609		2SD601		1	
Q610		2SC1567A		1	OR 2SC1567
Q611		2SD1051		1	
Q612		2SD601		1	
Q613		2SB819		1	
Q614		2SD601		1	
Q615		2SC1567A		1	
Q616		2SD601A		1	
Q617		2SB709		1	
Q618		2SB970		1	
Q619		2SD1051		1	
Q620		2SB709		1	
Q621		2SD814		1	
Q622		2SD601		1	
Q623		2SB792		1	
Q624		2SD814		1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
Q625		2SB709		1	
Q626		2SD601A		1	
Q628		2SD601		1	
Q629		2SD601		1	
Q630		2SB709		1	
Q631		2SD601		1	
Q633		2SD601A		1	
Q901		2SD601		1	
Q902		2SB970		1	
			DIODES		
D201		MA151K		1	
D301		MA151K		1	
D302		OA90		1	
D303		MA700		1	
D401		MA151WA		1	
D402		MA151K		1	
D403		MA345B		1	
D404		MA345B		1	
D601		MA151K		1	
D602		MA3075		1	
D603		MA151K		1	
D604		10E2		1	
D605		MA152K		1	
D606		MA162A		1	
D607		MA151K		1	
D608		MA151K		1	
D901		MA151K		1	
			RESISTORS		
R200		ERJ6GCYJ683	CHIP 68K	1	
R201		ERJ6GCYJ222	CHIP 2.2K	1	
R202		ERJ6GCYJ103	CHIP 10K	1	
R203		ERJ6GCYJ273	CHIP 27K	1	
R204		ERJ6GCYJ103	CHIP 10K	1	
R206		ERJ6GCYJ154	CHIP 150K	1	
R207		ERJ6GCYJ333	CHIP 33K	1	
R208		ERJ6GCYJ273	CHIP 27K	1	
R209		ERJ6GCYJ333	CHIP 33K	1	
R210		ERJ6GCYJ393	CHIP 39K	1	
R212		ERJ6GCYJ103	CHIP 10K	1	
R213		ERJ6GCYJ105	CHIP 1M	1	
R214		ERJ6GCYJ333	CHIP 33K	1	
R215		ERJ6GCYJ183	CHIP 18K	1	
R216		ERJ6GCYJ102	CHIP 1K	1	
R217		ERJ6GCYJ563	CHIP 56K	1	
R218		ERJ6GCYJ102	CHIP 1K	1	
R219		ERJ6GCYJ331	CHIP 330	1	
R220		ERJ6GCYJ331	CHIP 330	1	
R221		ERJ6GCYJ102	CHIP 1K	1	
R222		ERJ6GCYJ102	CHIP 1K	1	
R223		ERJ6GCYJ102	CHIP 1K	1	
R224		ERJ6GCYJ331	CHIP 330	1	
R225		ERJ6GCYJ562	CHIP 5.6K	1	
R226		ERJ6GCYJ821	CHIP 820	1	
R227		ERJ6GCYJ102	CHIP 1K	1	
R228		ERJ6GCYJ273	CHIP 27K	1	
R229		ERJ6GCYJ102	CHIP 1K	1	
R230		ERJ6GCYJ683	CHIP 68K	1	
R241		ERJ6GCYJ102	CHIP 1K	1	
R242		ERJ6GCYJ102	CHIP 1K	1	
R300		ERJ6GCYJ101	CHIP 100	1	
R301		ERJ6GCYJ103	CHIP 10K	1	
R302		ERJ6GCYJ102	CHIP 1K	1	
R303		ERJ6GCYJ102	CHIP 1K	1	
R304		ERJ6GCYJ822	CHIP 8.2K	1	
R305		ERJ6GCYJ561	CHIP 560	1	
R306		ERJ6GCYJ331	CHIP 330	1	
R307		ERJ6GCYJ223	CHIP 22K	1	
R308		ERJ6GCYJ333	CHIP 33K	1	
R309		ERJ6GCYJ223	CHIP 22K	1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
R310		ERJ6GCYJ471	CHIP 470	1	
R311		ERJ6GCYJ223	CHIP 22K	1	
R312		ERJ6GCYJ332	CHIP 3.3K	1	
R313		ERJ6GCYJ333	CHIP 33K	1	
R314		ERJ6GCYJ102	CHIP 1K	1	
R315		ERJ6GCYJ223	CHIP 22K	1	
R316		ERJ6GCYJ103	CHIP 10K	1	
R317		ERJ6GCYJ333	CHIP 33K	1	
R318		ERJ6GCYJ333	CHIP 33K	1	
R319		ERJ6GCYJ333	CHIP 33K	1	
R320		ERJ6GCYJ333	CHIP 33K	1	
R321		ERJ6GCYJ104	CHIP 100K	1	
R322		ERJ6GCYJ333	CHIP 33K	1	
R323		ERJ6GCYJ223	CHIP 22K	1	
R324		ERJ6GCYJ223	CHIP 22K	1	
R325		ERJ6GCYJ223	CHIP 22K	1	
R326		ERJ6GCYJ103	CHIP 10K	1	
R327		ERJ6GCYJ332	CHIP 3.3K	1	
R328		ERJ6GCYJ393	CHIP 39K	1	
R329		ERJ6GCYJ333	CHIP 33K	1	
R330		ERJ6GCYJ333	CHIP 33K	1	
R331		ERJ6GCYJ333	CHIP 33K	1	
R332		ERJ6GCYJ333	CHIP 33K	1	
R333		ERJ6GCYJ472	CHIP 4.7K	1	
R334		ERJ6GCYJ333	CHIP 33K	1	
R335		ERJ6GCYJ682	CHIP 6.8K	1	
R336		ERJ6GCYJ823	CHIP 82K	1	
R337		ERJ6GCYJ332	CHIP 3.3K	1	
R338		ERJ6GCYJ103	CHIP 10K	1	
R339		ERJ6GCYJ332	CHIP 3.3K	1	
R340		ERJ6GCYJ682	CHIP 6.8K	1	
R341		ERJ6GCYJ223	CHIP 22K	1	
R342		ERJ6GCYJ152	CHIP 1.5K	1	
R343		ERJ6GCYJ103	CHIP 10K	1	
R344		ERJ6GCYJ332	CHIP 3.3K	1	
R345		ERJ6GCYJ332	CHIP 3.3K	1	
R346		ERJ6GCYJ122	CHIP 1.2K	1	
R347		ERJ6GCYG333	CHIP 33K	1	
R348		ERJ6GCYJ103	CHIP 10K	1	
R349		ERJ6GCYJ332	CHIP 3.3K	1	
R350		ERJ6GCYJ332	CHIP 3.3K	1	
R351		ERJ6GCYJ332	CHIP 3.3K	1	
R352		ERJ6GCYJ332	CHIP 3.3K	1	
R353		ERJ6GCYJ333	CHIP 33K	1	
R354		ERJ6GCYJ332	CHIP 3.3K	1	
R355		ERJ6GCYJ103	CHIP 10K	1	
R356		ERJ6GCYJ223	CHIP 22K	1	
R357		ERJ6GCYJ102	CHIP 1K	1	
R358		ERJ6GCYJ332	CHIP 3.3K	1	
R359		ERJ6GCYJ102	CHIP 1K	1	
R360		ERJ6GCYJ332	CHIP 3.3K	1	
R361		ERJ6GCYJ332	CHIP 3.3K	1	
R362		ERJ6GCYJ333	CHIP 33K	1	
R363		ERJ6GCYJ682	CHIP 6.8K	1	
R364		ERJ6GCYJ153	CHIP 15K	1	
R365		ERJ6GCYJ152	CHIP 1.5K	1	
R366		ERJ6GCYJ103	CHIP 10K	1	
R367		ERJ6GCYJ102	CHIP 1K	1	
R368		ERJ6GCYJ332	CHIP 3.3K	1	
R369		ERJ6GCYJ563	CHIP 56K	1	
R370		ERJ6GCYJ102	CHIP 1K	1	
R371		ERJ6GCYJ681	CHIP 680	1	
R372		ERJ6GCYJ561	CHIP 560	1	
R373		ERJ6GCYJ102	CHIP 1K	1	
R374		ERJ6GCYG561	CHIP 560	1	
R375		ERJ6GCYG133	CHIP 13K	1	
R376		ERJ6GCYJ102	CHIP 1K	1	
R377		ERJ6GCYJ563	CHIP 56K	1	
R378		ERJ6GCYJ823	CHIP 82K	1	
R381		ERJ6GCYG563	CHIP 56K	1	
R382		ERJ6GCYJ220	CHIP 22	1	
R383		ERJ6GCYJ103	CHIP 10K	1	
R386		ERJ6GCYJ274	CHIP 270K	1	
R387		ERJ6GCYJ224	CHIP 220K	1	
R401		ERJ6GCYJ331	CHIP 330	1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
R402		ERJ6GCYJ681	CHIP 680	1	
R403		ERJ6GCYJ222	CHIP 2.2K	1	
R404		ERJ6GCYJ391	CHIP 390	1	
R405		ERJ6GCYJ432	CHIP 4.3K	1	
R406		ERJ6GCYJ102	CHIP 1K	1	
R407		ERJ6GCYJ222	CHIP 2.2K	1	
R408		ERJ6GCYJ821	CHIP 820	1	
R410		ERJ6GCYJ471	CHIP 470	1	
R411		ERJ6GCYJ222	CHIP 2.2K	1	
R412		ERJ6GCYJ153	CHIP 15K	1	
R413		ERJ6GCYG472	CHIP 4.7K	1	
R414		ERJ6GCYG183	CHIP 18K	1	
R415		ERJ6GCYJ223	CHIP 22K	1	
R416		ERJ6GCYJ223	CHIP 22K	1	
R419		ERJ6GCYJ472	CHIP 4.7K	1	
R420		ERJ6GCYJ103	CHIP 10K	1	
R421		ERJ6GCYJ332	CHIP 3.3K	1	
R422		ERJ6GCYJ103	CHIP 10K	1	
R423		ERJ6GCYJ822	CHIP 8.2K	1	
R424		ERJ6GCYJ103	CHIP 10K	1	
R425		ERJ6GCYJ123	CHIP 12K	1	
R426		ERJ6GCYJ102	CHIP 1K	1	
R427		ERJ6GCYJ332	CHIP 3.3K	1	
R428		ERJ6GCYJ333	CHIP 33K	1	
R429		ERJ6GCYJ273	CHIP 27K	1	
R430		ERJ6GCYJ183	CHIP 18K	1	
R431		ERJ6GCYJ562	CHIP 5.6K	1	
R432		ERJ6GCYJ102	CHIP 1K	1	
R433		ERJ6GCYJ103	CHIP 10K	1	
R434		ERJ6GCYJ102	CHIP 1K	1	
R435		ERJ6GCYJ103	CHIP 10K	1	
R436		ERJ6GCYJ272	CHIP 2.7K	1	
R437		ERJ6GCYJ122	CHIP 1.2K	1	
R438		ERJ6GCYJ333	CHIP 33K	1	
R439		ERJ6GCYJ102	CHIP 1K	1	
R440		ERJ6GCYJ103	CHIP 10K	1	
R442		ERJ6GCYJ222	CHIP 2.2K	1	
R443		ERJ6GCYJ333	CHIP 33K	1	
R444		ERJ6GCYJ272	CHIP 2.7K	1	
R445		ERJ6GCYJ103	CHIP 10K	1	
R446		ERJ6GCYJ122	CHIP 1.2K	1	
R447		ERJ6GCYJ333	CHIP 33K	1	
R448		ERJ6GCYJ333	CHIP 33K	1	
R449		ERJ6GCYJ333	CHIP 33K	1	
R450		ERJ6GCYJ333	CHIP 33K	1	
R451		ERJ6GCYJ223	CHIP 22K	1	
R452		ERJ6GCYJ562	CHIP 5.6K	1	
R453		ERJ6GCYJ332	CHIP 3.3K	1	
R454		ERJ6GCYJ332	CHIP 3.3K	1	
R455		ERJ6GCYJ332	CHIP 3.3K	1	
R456		ERJ6GCYJ332	CHIP 3.3K	1	
R458		ERJ6GCYJ331	CHIP 330	1	
R459		ERJ6GCYJ331	CHIP 330	1	
R460		ERJ6GCYJ103	CHIP 10K	1	
R461		ERJ6GCYJ472	CHIP 4.7K	1	
R462		ERJ6GCYJ472	CHIP 4.7K	1	
R463		ERJ6GCYJ103	CHIP 10K	1	
R464		ERJ6GCYJ103	CHIP 10K	1	
R465		ERJ6GCYJ122	CHIP 1.2K	1	
R466		ERJ6GCYJ102	CHIP 1K	1	
R467		ERJ6GCYJ152	CHIP 1.5K	1	
R468		ERJ6GCYJ123	CHIP 12K	1	
R469		ERJ6GCYJ273	CHIP 27K	1	
R470		ERJ6GCYJ123	CHIP 12K	1	
R471		ERJ6GCYJ473	CHIP 47K	1	
R472		ERJ6GCYJ562	CHIP 5.6K	1	
R473		ERJ6GCYJ104	CHIP 100K	1	
R601		ERJ6GCYJ221	CHIP 220	1	
R602		ERJ6GCYJ564	CHIP 560K	1	
R603		ERJ6GCYJ103	CHIP 10K	1	
R604		ERJ6GCYJ103	CHIP 10K	1	
R605		ERJ6GCYJ103	CHIP 10K	1	
R606		ERJ6GCYG563	CHIP 56K	1	
R607		ERJ6GCYG473	CHIP 47K	1	
R608		ERJ6GCYJ682	CHIP 6.8K	1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
R609		ERJ6GCYJ222	CHIP 2.2K	1	
R610		ERJ6GCYJ101	CHIP 100	1	
R611		ERJ6GCYJ220	CHIP 22	1	
R612		ERJ6GCYJ104	CHIP 100K	1	
R613		ERJ6GCYJ274	CHIP 270K	1	
R614		ERJ6GCYJ103	CHIP 10K	1	
R615		ERJ6GCYJ105	CHIP 1M	1	
R616		ERJ6GCYJ333	CHIP 33K	1	
R617		ERJ6GCYJ222	CHIP 2.2K	1	
R618		ERJ6GCYJ562	CHIP 5.6K	1	
R620		ERJ6GCYJ154	CHIP 150K	1	
R621		ERJ6GCYK106	CHIP 10M	1	
R622		ERJ6GCYJ102	CHIP 1K	1	
R623		ERJ6GCYJ563	CHIP 56K	1	
R624		ERJ6GCYJ471	CHIP 470	1	
R625		ERJ6GCYJ220	CHIP 22	1	
R626		ERJ6GCYJ270	CHIP 27	1	
R627		ERJ6GCYJ273	CHIP 27K	1	
R628		ERJ6GCYJ334	CHIP 330K	1	
R629		ERJ6GCYJ123	CHIP 12K	1	
R630		ERJ6GCYG823	CHIP 82K	1	
R631		ERJ6GCYG223	CHIP 22K	1	
R632		ERJ6GCYJ123	CHIP 12K	1	
R633		ERJ6GCYJ273	CHIP 27K	1	
R634		ERJ6GCYJ333	CHIP 33K	1	
R635		ERJ6GCYJ104	CHIP 100K	1	
R636		ERJ6GCYJ333	CHIP 33K	1	
R637		ERJ6GCYJ103	CHIP 10K	1	
R638		ERJ6GCYJ221	CHIP 220	1	
R639		ERJ6GCYJ223	CHIP 22K	1	
R640		ERJ6GCYJ122	CHIP 1.2K	1	
R641		ERJ6GCYJ102	CHIP 1K	1	
R642		ERJ6GCYJ564	CHIP 560K	1	
R643		ERJ6GCYJ154	CHIP 150K	1	
R644		ERJ6GCYJ824	CHIP 820K	1	
R646		VREO021		1	
R647		ERJ6GCYJ560	CHIP 56	1	
R648		ERJ6GCYJ102	CHIP 1K	1	
R649		ERJ6GCYK106	CHIP 10M	1	
R650		ERJ6GCYK106	CHIP 10M	1	
R651		ERJ6GCYK106	CHIP 10M	1	
R652		ERJ6GCYJ120	CHIP 12	1	
R653		ERJ6GCYJ120	CHIP 12	1	
R654		ERJ6GCYJ681	CHIP 680	1	
R655		ERJ6GCYG272	CHIP 2.7K	1	
R656		ERJ6GCYG472	CHIP 4.7K	1	
R657		ERJ6GCYJ394	CHIP 390K	1	
R658		ERJ6GCYJ683	CHIP 68K	1	
R659		ERJ6GCYJ564	CHIP 560K	1	
R660		ERJ6GCYJ684	CHIP 680K	1	
R661		ERJ6GCYJ223	CHIP 22K	1	
R662		ERJ6GCYJ223	CHIP 22K	1	
R663		ERJ6GCYJ103	CHIP 10K	1	
R664		ERJ6GCYJ102	CHIP 1K	1	
R665		ERJ6GCYJ103	CHIP 10K	1	
R666		ERJ6GCYJ103	CHIP 10K	1	
R667		ERJ6GCYJ122	CHIP 1.2K	1	
R668		ERJ6GCYJ103	CHIP 10K	1	
R669		ERJ6GCYJ102	CHIP 1K	1	
R670		ERJ6GCYJ105	CHIP 1M	1	
R671		ERJ6GCYJ392	CHIP 3.9K	1	
R672		ERJ6GCYJ103	CHIP 10K	1	
R673		ERJ6GCYJ100	CHIP 10	1	
R674		ERJ6GCYJ333	CHIP 33K	1	
R676		ERJ6GCYJ332	CHIP 3.3K	1	
R677		ERJ6GCYJ560	CHIP 56	1	
R678		ERJ6GCYJ102	CHIP 1K	1	
R679		ERJ6GCYJ183	CHIP 18K	1	
R680		ERJ6GCYJ103	CHIP 10K	1	
R681		ERJ6GCYJ103	CHIP 10K	1	
R682		ERJ6GCYJ333	CHIP 33K	1	
R683		ERJ6GCYJ182	CHIP 1.8K	1	
R684		ERJ6GCYJ103	CHIP 10K	1	
R685		ERJ6GCYJ124	CHIP 120K	1	
R686		ERJ6GCYJ332	CHIP 3.3K	1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
R687		ERJ6GCYJ473	CHIP 47K	1	
R688		ERJ6GCYJ102	CHIP 1K	1	
R689		ERJ6GCYJ102	CHIP 1K	1	
R690		ERJ6GCYJ103	CHIP 10K	1	
R691		ERJ6GCYJ333	CHIP 33K	1	
R692		ERJ6GCYJ102	CHIP 1K	1	
R694		ERJ6GCYJ272	CHIP 2.7K	1	
R695		ERJ6GCYJ181	CHIP 180	1	
R696		ERJ6GCYJ152	CHIP 1.5K	1	
R697		ERJ6GCYJ151	CHIP 150	1	
R698		ERJ6GCYJ822	CHIP 8.2K	1	
R901		ERJ6GCYJ563	CHIP 56K	1	
R902		ERJ6GCYJ102	CHIP 1K	1	
R903		ERJ6GCYJ563	CHIP 56K	1	
R904		ERJ6GCYJ563	CHIP 56K	1	
R905		ERJ6GCYJ152	CHIP 1.5K	1	
R906		ERJ6GCYJ154	CHIP 150K	1	
R907		ERJ6GCYJ563	CHIP 56K	1	
R908		ERJ6GCYJ563	CHIP 56K	1	
R909		ERJ6GCYJ272	CHIP 2.7K	1	
R910		ERJ6GCYJ221	CHIP 220	1	
R911		ERJ6GCYJ563	CHIP 56K	1	
R912		ERJ6GCYJ563	CHIP 56K	1	
R913		ERJ6GCYJ105	CHIP 1M	1	
R914		ERJ6GCYJ105	CHIP 1M	1	
R915		ERJ6GCYJ473	CHIP 47K	1	
R916		ERJ6GCYJ473	CHIP 47K	1	
R917		ERJ6GCYJ104	CHIP 100K	1	
R918		ERJ6GCYJ104	CHIP 100K	1	
R919		ERJ6GCYJ222	CHIP 2.2K	1	
R920		ERJ6GCYJ103	CHIP 10K	1	
R921		ERJ6GCYJ563	CHIP 56K	1	
R922		ERJ6GCYJ103	CHIP 10K	1	
R923		ERJ6GCYK8R2	CHIP 8.2	1	
R924		ERJ6GCYJ333	CHIP 33K	1	
R925		ERJ6GCYJ563	CHIP 56K	1	
R926		ERJ6GCYJ681	CHIP 680	1	
RA901		EXBM16D70CG	RADER RESISTER	1	
RA902		EXBM16D70CG	RADER RESISTER	1	
			CAPACITORS		
C200		ECUX1H103KBN	CERAMIC 50V 0.01	1	
C201		ECUX1H102KN	CERAMIC 50V 1000P	1	
C202		ECUX1H103KBN	CERAMIC 50V 0.01	1	
C203		ECUX1H103KBN	CERAMIC 50V 0.01	1	
C204		ECUX1E473ZFN	CERAMIC 25V 0.047	1	
C206		ECEA1CKS100	ELECTROLYTIC 16V 10	1	
C208		ECEA1HKS010	ELECTROLYTIC 50V 1	1	
C209		ECEA1AKS470	ELECTROLYTIC 10V 47	1	
C210		ECUX1H680KN	CERAMIC 50V 68P	1	
C211		ECUX1E333MDN	CERAMIC 25V 0.033	1	
C212		ECUX1H101KN	CERAMIC 50V 100P	1	
C213		ECEA1AKS220	ELECTROLYTIC 10V 22	1	
C214		ECUX1E104ZFN	CERAMIC 25V 0.1	1	
C216		ECUX1E104ZFN	CERAMIC 25V 0.1	1	
C219		ECUX1E104ZFN	CERAMIC 25V 0.1	1	
C220		ECSF1AE476	TANTALUM 10V 47	1	
C221		ECEA1AU101	ELECTROLYTIC 10V 100	1	
C300		ECUX1H120KN	CERAMIC 50V 12P	1	
C301		ECEA1EKS4R7	ELECTROLYTIC 25V 4.7	1	
C302		ECEA1EKS4R7	ELECTROLYTIC 25V 4.7	1	
C303		ECEA1EKS4R7	ELECTROLYTIC 25V 4.7	1	
C304		ECUX1H222KBN	CERAMIC 50V 2200P	1	
C305		ECRJA050M11	TRIMER 100V 50P	1	
C306		ECSF1AE226	TANTALUM 10V 22	1	
C307		ECUX1H222KBN	CERAMIC 50V 2200P	1	
C308		ECUX1H330KN	CERAMIC 50V 33P	1	
C309		ECUX1E104ZFN	CERAMIC 25V 0.1	1	
C310		ECUX1H222KBN	CERAMIC 50V 2200P	1	
C311		ECUX1H330KN	CERAMIC 50V 33P	1	
C312		ECUX1E104ZFN	CERAMIC 25V 0.1	1	
C313		ECUX1E104ZFN	CERAMIC 25V 0.1	1	
C314		ECUX1E104ZFN	CERAMIC 25V 0.1	1	

Ref.No.		Part No.	Part Name & Description			Pcs	Remarks
C315		ECEA0JKS220	ELECTROLYTIC	6.3V	22	1	
C316		ECUX1E104ZFN	CERAMIC	25V	0.1	1	
C317		ECUX1E104ZFN	CERAMIC	25V	0.1	1	
C318		ECUX1E473ZFN	CERAMIC	25V	0.04	1	
C319		ECUX1E104ZFN	CERAMIC	25V	0.1	1	
C320		ECEA1EKS4R7	ELECTROLYTIC	25V	4.7	1	
C321		ECEA1CKS100	ELECTROLYTIC	16V	10	1	
C322		ECEA1EKS4R7	ELECTROLYTIC	25V	4.7	1	
C323		ECUX1H102KN	CERAMIC	50V	1000P	1	
C324		ECUX1H391KN	CERAMIC	50V	390P	1	
C325		ECSF0JE106	TANTALUM	50V	10	1	
C326		ECUX1E104ZFN	CERAMIC	25V	0.1	1	
C327		ECEA0JKS220	ELECTROLYTIC	6.3V	22	1	
C328		ECUX1H222KBN	CERAMIC	50V	2200P	1	
C329		ECUX1H121KN	CERAMIC	50V	120P	1	
C330		ECEA0JKS470	ELECTROLYTIC	6.3V	47	1	
C331		ECUX1E104ZFN	CERAMIC	25V	0.1	1	
C332		ECEA0JKS470	ELECTROLYTIC	6.3V	47	1	
C333		ECUX1H101KN	CERAMIC	50V	100P	1	
C334		ECUX1E104ZFN	CERAMIC	25V	0.1	1	
C335		ECUX1E104ZFN	CERAMIC	25V	0.1	1	
C400		ECUX1H100FCN	CERAMIC	50V	10P	1	
C401		ECUX1E104ZFN	CERAMIC	25V	0.1	1	
C402		ECUX1H103KBN	CERAMIC	50V	0.01	1	
C403		ECUX1H103KBN	CERAMIC	50V	0.01	1	
C404		ECUX1H103KBN	CERAMIC	50V	0.01	1	
C405		ECUX1H103KBN	CERAMIC	50V	0.01	1	
C406		ECUX1H103KBN	CERAMIC	50V	0.01	1	
C407		ECSF1AE226	TANTALUM	10V	22	1	
C410		ECEA1CKS100	ELECTROLYTIC	16V	10	1	
C411		ECEA0JKS470	ELECTROLYTIC	6.3V	47	1	
C412		ECUX1H473ZFN	CERAMIC	50V	0.047	1	
C413		ECUX1H222KBN	CERAMIC	50V	2200P	1	
C414		ECEA1CKS100	ELECTROLYTIC	16V	10	1	
C415		ECUX1E104ZFN	CERAMIC	25V	0.1	1	
C416		ECUX1E104ZFN	CERAMIC	25V	0.1	1	
C417		ECUX1E104ZFN	CERAMIC	25V	0.1	1	
C418		ECEA1AKS470	ELECTROLYTIC	10V	47	1	
C419		ECEA0JKS470	ELECTROLYTIC	6.3V	47	1	
C420		ECUX1E104ZFN	CERAMIC	25V	0.1	1	
C422		ECEA0JKS470	ELECTROLYTIC	6.3V	47	1	
C423		ECEA0JKS470	ELECTROLYTIC	6.3V	47	1	
C424		ECQV1H683JZ	MYLAR	50V	0.068	1	
C425		ECEA0JKS470	ELECTROLYTIC	6.3V	47	1	
C426		ECUX1E104ZFN	CERAMIC	25V	0.1	1	
C427		ECQB1H223	MYLAR	50V	0.022	1	
C428		ECUX1E104ZFN	CERAMIC	25V	0.1	1	
C429		ECUX1H331KN	CERAMIC	50V	330P	1	
C430		ECEA1CKS100	ELECTROLYTIC	16V	10	1	
C431		ECUX1E104ZFN	CERAMIC	25V	0.1	1	
C432		ECEA0JKS470	ELECTROLYTIC	6.3V	47	1	
C433		ECUX1H120KN	CERAMIC	50V	12P	1	
C434		ECUX1H103KBN	CERAMIC	50V	0.01	1	
C435		ECUX1H103KBN	CERAMIC	50V	0.01	1	
C436		ECUX1H330KN	CERAMIC	50V	33P	1	
C437		ECUX1E104ZFN	CERAMIC	25V	0.1	1	
C440		ECSF1AE226	TANTALUM	10V	22	1	
C441		ECUX1H150KN	CERAMIC	50V	15P	1	
C442		ECRJA030E11	TRIMER	100V	30P	1	
C444		ECUX1H181KN	CERAMIC	50V	180P	1	
C445		ECUX1H103KBN	CERAMIC	50V	0.01	1	
C446		ECUX1H103KBN	CERAMIC	50V	0.01	1	
C447		ECUX1E104ZFN	CERAMIC	25V	0.1	1	
C448		ECUX1H470KN	CERAMIC	50V	47P	1	
C449		ECUX1H120KN	CERAMIC	50V	12P	1	
C506		ECUX1H471KN	CERAMIC	50V	470P	1	
C507		ECUX1H471KN	CERAMIC	50V	470P	1	
C601		ECEA1ASS101	ELECTROLYTIC	10V	100	1	
C602		ECUX1H102KN	CERAMIC	50V	1000P	1	
C603		ECEA1ASS221	ELECTROLYTIC	10V	220	1	
C604		ECUX1H102KN	CERAMIC	50V	1000P	1	
C605		ECEA0JSS101	ELECTROLYTIC	6.3V	100	1	
C606		ECEA0JU221	ELECTROLYTIC	6.3V	220	1	
C607		ECEA1HKS0R1	ELECTROLYTIC	50V	0.1	1	
C608		ECUX1H101KN	CERAMIC	50V	100P	1	

Ref.No.		Part No.	Part Name & Description			Pcs	Remarks
C609		ECEA1HKS010	ELECTROLYTIC	50V	1	1	
C610		ECUX1E104ZFN	CERAMIC	25V	0.1	1	
C611		ECQV1H224JZ	MYLAR	50V	0.22	1	
C612		ECEA1AKS470	ELECTROLYTIC	10V	47	1	
C613		ECUX1H151KN	CERAMIC	50V	150P	1	
C614		ECUX1H473ZFN	CERAMIC	50V	0.04	1	
C615		ECUX1H473ZFN	CERAMIC	50V	0.04	1	
C617		ECUX1H473ZFN	CERAMIC	50V	0.04	1	
C618		ECUX1H473ZFN	CERAMIC	50V	0.04	1	
C619		ECEA0JU101	ELECTROLYTIC	6.3V	100	1	
C620		ECUX1E104ZFN	CERAMIC	25V	0.1	1	
C621		ECQM1102JZ	MYLAR	100V	1000P	1	
C622		ECEA1ASS101	ELECTROLYTIC	10V	100	1	
C623		ECSF1CE476	TANTALUM	16V	47	1	
C624		ECUX1E104ZFN	CERAMIC	25V	0.1	1	
C625		ECUX1E104ZFN	CERAMIC	25V	0.1	1	
C626		ECUX1H151KN	CERAMIC	50V	150P	1	
C627		ECKF1H332MDY	CERAMIC	50V	3300P	1	
C628		ECUX1E104ZFN	CERAMIC	25V	0.1	1	
C629		ECUX1H330KN	CERAMIC	50V	33P	1	
C630		ECUX1H102KN	CERAMIC	50V	1000P	1	
C631		ECEA1HKN010	ELECTROLYTIC	50V	1	1	
C632		ECUX1E104ZFN	CERAMIC	25V	0.1	1	
C633		ECEA1AU101	ELECTROLYTIC	10V	100	1	
C634		ECQM2182KZ	MYLAR	200V	1800P	1	
C635		ECQM1682KZ	MYLAR	100V	6800P	1	
C636		ECEA1HK100	ELECTROLYTIC	50V	10	1	
C637		ECEA2AU3R3	ELECTROLYTIC	100V	3.3	1	
C638		ECEA2VS010	ELECTROLYTIC	350V	1	1	
C639		VCK0018	CERAMIC	2KV	1500P	1	
C640		VCK0017	CERAMIC	1KV	1500P	1	
C641		ECUX1H121KN	CERAMIC	50V	120P	1	
C642		ECUX1H121KN	CERAMIC	50V	120P	1	
C643		ECEA0JU101	ELECTROLYTIC	6.3V	100	1	
C644		ECUX1H473ZFN	CERAMIC	50V	0.04	1	
C645		ECUX1H470KN	CERAMIC	50V	47P	1	
C646		ECUX1H473ZFN	CERAMIC	50V	0.04	1	
C647		ECUX1H473ZFN	CERAMIC	50V	0.04	1	
C648		ECUX1H331KN	CERAMIC	50V	330P	1	
C649		ECUX1H331KN	CERAMIC	50V	330P	1	
C650		ECUX1H102KN	CERAMIC	50V	1000P	1	
C652		ECUX1H103KBN	CERAMIC	50V	0.01	1	
C653		ECUX1H473ZFN	CERAMIC	50V	0.04	1	
C901		ECEA0JKS470	ELECTROLYTIC	6.3V	47	1	OR ECEA0GKS470
C902		ECEA1AKS470	ELECTROLYTIC	10V	47	1	
C903		ECUX1H330JCN	CERAMIC	50V	33P	1	
C904		ECEA10Z47	ELECTROLYTIC	10V	47	1	
C905		ECUX1E104ZFN	CERAMIC	25V	0.1	1	
C906		ECUX1E104ZFN	CERAMIC	25V	0.1	1	
C907		ECUX1E104ZFN	CERAMIC	25V	0.1	1	
C908		ECUX1E104ZFN	CERAMIC	25V	0.1	1	
			COILS				
L201		VLQ0163K101			100uH	1	
L202		VLQ0133K331			330uH	1	
L301		VLQ0163K150			15uH	1	
L302		VLQ0163K150			15uH	1	
L303		VLQ0163K330			33uH	1	
L304		VLQ0163K330			33uH	1	
L305		VLQ0163K101			100uH	1	
L306		VLQ0163K330			33uH	1	
L401		VLQ0163K330			33uH	1	
L402		VLQ0163K330			33uH	1	
L403		VLQ0163K330			33uH	1	
L404		VLQ0163K101			100uH	1	
L405		VLQ0163K330			33uH	1	
L406		EIC7QE008B			1uH	1	
L407		VLQ0163K330			33uH	1	
L408		VLQ0163K101			100uH	1	
1601		ELC04D001			56uH	1	
L602		EIR7QF005B			22mH	1	
L603		EIR7QF005B			22mH	1	
L901		VLQ0163K101			100uH	1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
			DELAY LINE		
DL301		EFIMT645L83F		1	
DL302		ELB4R002		1	
DL303		ELB4Q006		1	
			FILTERS		
FL202		VLF0378		1	
FL301		ELB4Q007		1	
FL302		ELB4T001		1	
FL303		ELB4Q009		1	
FL401		ELB4Q020		1	
			CONNECTORS		
P201		VJP1231T	4P	1	
P401		VJP1231R	4P	1	
P601		VJP1249T	9P	1	
P602		VJP1245T	5P	1	
P603		VJP1242T	2P	1	
			VARIABLE RESISTORS		
VR201		EVM6QSW00B14	10K	1	
VR202		EVM6QSW00B14	10K	1	
VR203		EVM6QSW00B14	10K	1	
VR204		EVM6QSW00B14	10K	1	
VR205		EVM6QSW00B14	10K	1	
VR301		EVM6QSW00B14	10K	1	
VR302		EVM6QSW00B52	500	1	
VR303		EVM6QSW00B52	500	1	
VR304		EVM6QSW00B13	1K	1	
VR306		EVM6QSW00B54	50K	1	
VR307		EVM6QSW00B54	50K	1	
VR308		EVM6QSW00B54	50K	1	
VR309		EVM6QSW00B14	10K	1	
VR310		EVM6QSW00B54	50K	1	
VR311		EVM6QSW00B54	50K	1	
VR312		EVM6QSW00B54	50K	1	
VR313		EVM6QSW00B54	50K	1	
VR314		EVM6QSW00B54	50K	1	
VR315		EVM6QSW00B54	50K	1	
VR316		EVM6QSW00B54	50K	1	
VR317		EVM6QSW00B54	50K	1	
VR318		EVM6QSW00B54	50K	1	
VR319		EVM6QSW00B54	50K	1	
VR320		EVM6QSW00B54	50K	1	
VR321		EVM6QSW00B14	10K	1	
VR322		EVM6QSW00B15	100K	1	
VR323		EVM6QSW00B15	100K	1	
VR324		EVM6QSW00B14	10K	1	
VR325		EVM6QSW00B54	50K	1	
VR401		EVM6QSW00B13	1K	1	
VR403		EVM6QSW00B24	20K	1	
VR404		EVM6QSW00B13	1K	1	
VR405		EVM6QSW00B13	1K	1	
VR406		EVM6QSW00B54	50K	1	
VR407		EVM6QSW00B14	10K	1	
VR408		EVM6QSW00B14	10K	1	
VR409		EVM6QSW00B14	10K	1	
VR410		EVM6QSW00B14	10K	1	
VR411		EVM6QSW00B14	10K	1	
VR412		EVM6QSW00B14	10K	1	
VR413		EVM6QSW00B53	5K	1	
VR414		EVM6QSW00B53	5K	1	
VR415		EVM6QSW00B13	1K	1	
VR601		EVML4GA00B23	2K	1	
VR602		EVM6QSW00B24	20K	1	
VR603		EVM6QSW00B25	200K	1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
VR604		EVML4GA00B26	2M	1	
VR605		EVM6QSW00B12	100	1	
VR606		EVM6QSW00B23	2K	1	
VR607		EVML4GA00B24	20K	1	
VR608		EVM6QSW00B13	1K	1	
VR609		EVM6QSW00B54	50K	1	
VR610		EVM33GA00BV6	5.6K	1	
VR611		EVML4GA00B26	2M	1	
VR612		EVML4GA00B23	2K	1	
VR901		EVM6QSW00B15	100K	1	
VR902		EVM6QSW00B15	100K	1	
			THERMISTOR		
TH601		ERTD2FCL101S		1	
			TRANSFORMER		
E601		ETF14L3B	F.B.T	1	<1>
			CRYSTAL OSCILLATOR		
X401		VSX0114		1	
			MISCELLANEOUS		
		VSC1341	SHILELD CASE	1	
		VSC1342	SHILELD CASE	1	
		VSC1464	SHILELD CASE	1	
		VSC1581	SHILELD CASE	1	
	■	VEP23043A	SYNC SUB C.B.A.		
			INTEGRATED CIRCUITS		
IC701		MN6160PBS		1	
			TRANSISTORS		
Q701		2SD601		1	
			RESISTORS		
R701		ERJ6GCYJ682	CHIP 6.8K	1	
R702		ERJ6GCYJ152	CHIP 1.5K	1	
R704		ERJ6GCYJ272	CHIP 2.7K	1	
R705		ERJ6GCYJ103	CHIP 10K	1	
R706		ERJ6GCYJ822	CHIP 8.2K	1	
R707		ERJ6GCYJ123	CHIP 12K	1	
R708		ERJ6GCYJ103	CHIP 10K	1	
R709		ERJ6GCYJ123	CHIP 12K	1	
R710		ERJ6GCYJ182	CHIP 1.8K	1	
R711		ERJ6GCYJ822	CHIP 8.2K	1	
R712		ERJ6GCYJ223	CHIP 22K	1	
			CAPACITORS		
C701		ECUX1E473ZFN	CERAMIC 25V 0.047	1	
C702		ECUX1E473ZFN	CERAMIC 25V 0.047	1	
C703		ECUX1H471KN	CERAMIC 50V 470P	1	
C704		ECUX1H330KN	CERAMIC 50V 33P	1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
	■	VEP20187A	CAMERA SENSOR C.B.A.		
			INTEGRATED CIRCUITS		
IC501		NJM2902M		1	
IC502		VCR0122		1	
			RESISTORS		
R501		ERJ6GCYJ103	CHIP 10K	1	
R502		VRE0022		1	
R503		ERJ6GCYJ392	CHIP 3.9K	1	
R504		ERJ6GCYJ824	CHIP 820K	1	
R505		ERJ6GCYG333	CHIP 33K	1	
R506		ERJ6GCYG333	CHIP 33K	1	
R507		ERJ6GCYJ103	CHIP 10K	1	
R508		ERJ6GCYJ103	CHIP 10K	1	
R509		ERJ6GCYJ333	CHIP 33K	1	
R510		ERJ6GCYJ333	CHIP 33K	1	
R511		ERJ6GCYJ103	CHIP 10K	1	
R512		VRE0023		1	
R513		VRE0023		1	
R514		ERJ6GCYJ223	CHIP 22K	1	
R515		ERJ6GCYJ333	CHIP 33K	1	
R516		ERJ6GCYJ103	CHIP 10K	1	
			CAPACITORS		
C501		ECEA10Z22	ELECTROLYTIC 10V 22	1	
C502		ECEA10Z22	ELECTROLYTIC 10V 22	1	
C503		ECEA1HU010	ELECTROLYTIC 50V 1	1	
C504		ECKF1H103ZF	CERAMIC 50V 10	1	
C505		ECKF1H103ZF	CERAMIC 50V 10	1	
C506		ECUX1H471KN	CERAMIC 50V 470P	1	
C507		ECUX1H471KN	CERAMIC 50V 470P	1	
			CONNECTORS		
P501		VJP1231T	4P	1	
			VARIABLE RESISTERS		
VR501		EVM6QSW00BE3	2.2K	1	
VR502		EVM6QSW00B14	10K	1	
			COLOUR SENSOR		
PD501		PN1361	PHOTO TRANSISTOR	1	
	■	VEP26041A	CAMERA OPERATION C.B.A.		
			RESISTERS		
R01		ERJ6GCYJ562	CHIP 5.6K	1	
R02		ERJ6GCYJ563	CHIP 56K	1	
R03		ERJ6GCYJ154	CHIP 150K	1	
R04		ERJ6GCYJ563	CHIP 56K	1	
R05		ERJ6GCYJ822	CHIP 8.2K	1	
			VARIABLE RESISTER		
VR02		VRV0038	10K	1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
			CONNECTOR		
P01		VJP1245T	5P	1	
			SWITCHES		
SW01		VSS0143	AWT SW	1	
SW02		VSP0152	AWC SET SW	1	
	■	VEP20188A	ZOOM C.B.A.		
			TRANSISTORS		
Q801		2SB641		1	(R,S)
Q802		2SD636		1	(R,S)
Q803		2SB641		1	(R,S)
Q804		2SD636		1	(R,S)
Q805		2SD636		1	(R,S)
Q806		2SD636		1	(R,S)
			RESISTERS		
R801		ERDS2TJ272	2.7K	1	
R802		ERDS2TJ272	2.7K	1	
R803		ERDS2TJ223	2.2K	1	
R804		ERDS2TJ272	2.7K	1	
R805		ERDS2TJ272	2.7K	1	
R806		ERDS2TJ223	22K	1	
R807		ERDS2TJ470	47	1	
R808		ERDS2TJ470	47	1	
R809		ERDS2TJ562	5.6K	1	
R810		ERDS2TJ682	6.8K	1	
			CAPASITOR		
C801		ECEA0JK221	ELECTROLYTIC 6.3V 220	1	
			CONNECTORS		
P801		VJP1242T	2P	1	
P802		VJP1242R	2P	1	
P803		VJP1243T	3P	1	
			THERMISTOR		
TH801		ERTD2FHK202S		1	
			SWITCHES		
SW802		EVQQS205K	REC REV SW	1	
SW803		VSP0148	ZOOM SW	1	
SW804		VSP0148	ZOOM SW	1	
	■	VEP00F17C	E.V.F. C.B.A.		
			INTEGRATED CIRCUIT		
IC101		AN2510S		1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
			RESISTORS		
R101		ERJ8GCYJ222	2.2K	1	
R102		ERJ8GCYJ561	560	1	
R103		ERD2FCG100	FUSE 10	1	
R104		ERJ8GCYJ182	1.8K	1	
R105		ERJ8GCYJ332	3.3K	1	
R106		ERJ8GCYG682	6.8K	1	
R107		ERJ8GCYJ151	150	1	
R108		ERJ8GCYJ102	1K	1	
R109		ERJ8GCYK3R9	3.9	1	
R110		ERJ8GCYJ102	1K	1	
R111		ERJ8GCYJ222	2.2K	1	
R112		ERJ8GCYJ683	68K	1	
R113		ERJ8GCYJ562	5.6K	1	
R114		ERJ8GCYJ180	18	1	
R115		ERQ14AJ3R3P	1/4W 3.3	1	
			VARIABLE RESISTORS		
VR101		EVNB1AA00B22	200	1	V-HEIGHT
VR102		EVNB1AA00B53	5K	1	H-HOLD
			CAPACITORS		
C101		ECEA1HKNR22	ELECTROLYTIC 50V 0.22	1	
C102		ECEA0JK221	ELECTROLYTIC 6.3V 220	1	
C103		ECEA1AKS330	ELECTROLYTIC 10V 33	1	OR ECEA1AK330
C104		VCF0037	MALAR 63V 0.68	1	
C105		ECEA1AKS330	ELECTROLYTIC 10V 33	1	OR ECEA1AK330
C106		ECKF1H561KB	CERAMIC 50V 560	1	
C107		ECUX1H223KBM	CERAMIC 50V 0.022	1	
C108		ECEA1CKS100	ELECTROLYTIC 16V 10	1	OR ECEA1CK100
C109		VCF0039	MALAR 50V 1500P	1	
C110		ECEA0JKS101	ELECTROLYTIC 6.3V 100	1	
C111		ECEA0JKS101	ELECTROLYTIC 6.3V 100	1	OR ECEA0JK101
					OR ECEA1AK101
			COIL		
L101		VEK2451		1	
			IC PROTECTOR		
CP101		VSF0015A04		1	
			THERMISTOR		
TH101		VRT0012		1	
			THERMAL FUSE		
TF101		VSF0044		1	
	■	VEP00F18C	HIGH VOLTAGE C.B.A.		
			TRANSISTORS		
Q201		2SD763		1	OR 2SD974,
					2SC2235
Q202		2SD958		1	
Q203		2SA564		1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
			DIODES		
D201		MA150		1	
D202		MA162		1	
D203		VO6C		1	
D204		V11J		1	
			RESISTORS		
R201		VRE0059B222	2.2K	1	
R202		VRE0059B824	820K	1	
R203		VRE0059B155	1.5M	1	
R204		VRE0059B224	220K	1	
R205		VRE0059B102	1K	1	
R206		VRE0059B393	39K	1	
R207		VRE0059B103	10K	1	
R208		VRE0059B122	1.2K	1	
R209		VRE0059B103	10K	1	
R210		VRE0059B105	1M	1	
R211		VRE0059B101	100	1	
R212		VRE0059B472	4.7K	1	
			VARIABLE RESISTORS		
VR201		VRV0040B225	2.2M	1	FOCUS
VR202		VRV0040B474	470K	1	BRIGHT
VR203		VRV0040B222	2.2K	1	CONTRAST
			CAPACITORS		
C201		ECEA1CKS100	ELECTROLYTIC 16V 10	1	
C202		ECEA1ASS470	ELECTROLYTIC 10V 47	1	
C203		VCF0040	MYLAR 100V 1800P	1	
C204		ECEA1HKS4R7	ELECTROLYTIC 50V 4.7	1	
C205		ECEA1AKS220	ELECTROLYTIC 10V 22	1	
C206		ECKF1H271KB	CERAMIC 50V 270P	1	
C207		ECEA1AK101	ELECTROLYTIC 10V 100	1	OR ECEA1ASS101
C208		VCK0027	CERAMIC 1KV 1500P	1	
C209		VCK0028	CERAMIC 500V 1500P	1	
C210		VCF0035	MYLAR 100V 0.033	1	OR VCF0036
C211		ECEA1HKS010	ELECTROLYTIC 50V 1	1	OR ECEA1HK010
			COILS		
L201		VLQ0175	700uH	1	
L202		VLQ0176	100uH	1	OR ELEH101KA
			TRANSFORMER		
T201		VLT0248	F.B.T.	1	
			IC PROTECTOR		
CP201		VSF0015A04		1	
			TEMPERATURE FUSE		
TF201		VSF0040		1	<!>
	■	VJB00F19	CONNECTOR C.B.		
			CONNECTOR		
		VJP1640T	7P	1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
	■	VJB00F20	LED C.B.		
			DIODE		
D301		LN251RPP.WE	LED	1	
			RESISTOR		
R301		ERJ8GCYJ332	3.3K	1	
	■	VEP00F61A	AUTO FOCUS C.B.A.		
			INTEGRATED CIRCUIT		
IC1		AN6552S		1	
IC2		AN6552S		1	
IC3		AN2581S		1	
IC4		AN78L05		1	
IC5		AN1324NS		1	OR AN6564NS
IC6		NJM2902M		1	
IC7		MN1551VXNS		1	OR MN1551VXN
IC8		AN6914S		1	
			TRANSISTORS		
Q1		2SD601		1	(Q,R,S)
Q2		2SD601		1	(Q,R,S)
Q3		2SD1742		1	(P,Q)
Q4		2SD602		1	(Q,R,S)
Q5		2SD601		1	(Q,R,S)
Q6		2SB709		1	(Q,R,S)
Q10		2SD602		1	(Q,R,S)
Q11		2SD973		1	(Q,R,S)
Q12		2SB793		1	(Q,R,S)
Q13		2SB970		1	(Q,R,S)
Q16		2SD601		1	(Q,R,S)
Q17		2SD601		1	(Q,R,S)
			DIODE		
D1		MA151		1	
			COMBINATION PARTS		
			(TRANSISTOR & RESISTOR)		
QR7		UN2121		1	
QR8		UN2121		1	
QR9		UN2221		1	
QR10		2SD602		1	
QR14		UN2213		1	
QR18		UN2213		1	
			RESISTORS		
R1		ERO25UKF1004	1M	1	
R2		ERJ6GCYJ224	CHIP 220K	1	
R3		ERJ6GCYJ224	CHIP 220K	1	
R4		ERO25UKF1004	1M	1	
R5		ERJ6GCYJ153	CHIP 15K	1	
R6		ERJ6GCYJ153	CHIP 15K	1	
R7		ERJ6GCYJ562	CHIP 5.6K	1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
R8		ERJ6GCYJ562	CHIP 5.6K	1	
R11		ERO52HKF4702	47K	1	
R12		ERO52HKF4702	47K	1	
R14		ERO52HKF2703	270K	1	
R15		ERO52HKF2703	270K	1	
R16		ERJ6GCYJ153	CHIP 15K	1	
R17		ERJ6GCYJ153	CHIP 15K	1	
R18		ERJ6GCYJ223	CHIP 22K	1	
R19		ERJ6GCYJ563	CHIP 56K	1	
R20		ERJ6GCYJ153	CHIP 15K	1	
R21		ERJ6GCYJ153	CHIP 15K	1	
R22		ERJ6GCYJ563	CHIP 56K	1	
R23		ERJ6GCYJ103	CHIP 10K	1	
R24		ERJ6GCYJ103	CHIP 10K	1	
R27		ERO52HKF2701	2.7K	1	
R28		ERO52HKF2201	2.2K	1	
R29		ERO52HKF1002	10K	1	
R30		ERO52HKF2202	22K	1	
R31		ERDS2TJ1R0	1K	1	
R32		ERJ6GCYJ121	CHIP 120	1	
R33		ERJ6GCYJ471	CHIP 470	1	
R34		ERJ6GCYJ103	CHIP 10K	1	
R35		ERJ6GCYJ272	CHIP 2.7K	1	
R36		ERJ6GCYJ122	CHIP 1.2K	1	
R38		ERJ6GCYJ183	CHIP 18K	1	
R39		ERJ6GCYJ183	CHIP 18K	1	
R40		ERJ6GCYJ562	CHIP 5.6K	1	
R41		ERJ6GCYJ223	CHIP 22K	1	
R42		ERJ6GCYJ473	CHIP 47K	1	
R43		ERJ6GCYJ332	CHIP 3.3K	1	
R44		ERJ6GCYJ332	CHIP 3.3K	1	
R45		ERJ6GCYJ472	CHIP 4.7K	1	
R46		ERJ6GCYJ332	CHIP 3.3K	1	
R47		ERJ6GCYJ183	CHIP 18K	1	
R49		ERJ6GCYJ183	CHIP 18K	1	
R50		ERJ6GCYJ183	CHIP 18K	1	
R53		ERJ6GCYJ104	CHIP 100K	1	
R54		ERJ6GCYJ124	CHIP 120K	1	
R55		ERJ6GCYJ104	CHIP 100K	1	
R56		ERJ6GCYJ104	CHIP 100K	1	
R57		ERJ6GCYJ104	CHIP 100K	1	
R58		ERJ6GCYJ104	CHIP 100K	1	
R59		ERJ6GCYJ104	CHIP 100K	1	
R60		ERJ6GCYJ104	CHIP 100K	1	
R61		ERJ6GCYJ183	CHIP 18K	1	
R62		ERJ6GCYJ183	CHIP 18K	1	
R64		ERJ6GCYJ333	CHIP 33K	1	
R65		ERJ6GCYJ222	CHIP 2.2K	1	
R75		ERJ6GCYJ333	CHIP 33K	1	
R76		ERJ6GCYJ333	CHIP 33K	1	
R77		ERJ6GCYJ104	CHIP 100K	1	
R78		ERJ6GCYJ222	CHIP 2.2K	1	
R79		ERJ6GCYJ473	CHIP 47K	1	
R80		ERJ6GCYJ153	CHIP 15K	1	
R90		ERJ6GCYJ153	CHIP 15K	1	
R99		ERJ6GCYJ102	CHIP 1K	1	
RA1		EXBM16D80AG		1	
			VARIABLE RESISTORS		
VR1		EVN3ACA00B14	10K	1	
VR2		EVN3ACA00B14	10K	1	
VR3		EVN3ACA00B13	1K	1	
VR4		EVN3ACA00B24	20K	1	
			CAPACITORS		
C1		ECUX1E333KBM	CERAMIC 25V 0.033	1	
C2		ECUX1E333KBM	CERAMIC 25V 0.033	1	
C3		ECUX1H030CCN	CERAMIC 50V 3P	1	
C4		ECUX1H030CCN	CERAMIC 50V 3P	1	
C5		ECUX1E103KBN	CERAMIC 25V 0.01	1	
C6		ECUX1E103KBN	CERAMIC 25V 0.01	1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
C7		ECSF1CE105	TANTALUM 16V 1	1	
C8		ECSF1CE105	TANTALUM 16V 1	1	
C9		ECUX1E103KBN	CERAMIC 25V 0.01	1	
C10		ECUX1E103KBN	CERAMIC 25V 0.01	1	
C11		ECUX1E103KBN	CERAMIC 25V 0.01	1	
C12		ECUX1E103KBN	CERAMIC 25V 0.01	1	
C13		ECSF1AE225	TANTALUM 10V 2.2	1	
C14		ECUX1E103KBN	TANTALUM 25V 0.01	1	
C15		ECUX1H472KBN	CERAMIC 50V 4700P	1	
C16		ECUX1E104ZFM	CERAMIC 25V 0.1	1	
C17		ECEA1CKN100	ELECTROLYTIC 16V 10	1	
C18		ECEA1CKN100	ELECTROLYTIC 16V 10	1	
C19		ECEA1EU101	ELECTROLYTIC 25V 100	1	
C20		ECEA1CKS100	ELECTROLYTIC 16V 10	1	
C21		ECEA1EU101	ELECTROLYTIC 25V 100	1	
C22		ECEA1CKS100	ELECTROLYTIC 16V 10	1	
C23		ECUX1E103KBN	CERAMIC 25V 0.1	1	
C24		ECEA1CKS100	ELECTROLYTIC 16V 10	1	
C25		ECSF1AE106	TANTALUM 10V 10	1	
C26		ECEA1CKS100	ELECTROLYTIC 16V 10	1	
C27		ECSF1AE225	TANTALUM 10V 2.2	1	
C28		ECSF1AE225	TANTALUM 10V 2.2	1	
C29		ECEA1CKS100	ELECTROLYTIC 16V 10	1	
C31		ECEA1CKS100	ELECTROLYTIC 16V 10	1	
C32		ECSF1VE684	TANTALUM 35V 0.68	1	
C33		ECUX1H220KCN	CERAMIC 50V 22P	1	
C34		ECUX1H220KCN	CERAMIC 50V 22P	1	
C35		ECUX1E103KBN	CERAMIC 50V 0.01	1	
C36		ECUX1E103KBN	CERAMIC 25V 0.01	1	
C37		ECUX1E103KBN	CERAMIC 25V 0.01	1	
C38		ECUX1E103KBN	CERAMIC 25V 0.01	1	
C39		ECUX1E103KBN	CERAMIC 25V 0.01	1	
C40		ECUX1E103KBN	CERAMIC 25V 0.01	1	
C47		ECUX1H221JCN	CERAMIC 50V 220	1	
C48		ECUX1H221JCN	CERAMIC 50V 220	1	
C49		ECUX1H221JCN	CERAMIC 50V 220	1	
C50		ECUX1H221JCN	CERAMIC 50V 220	1	
C51		ECUX1E104ZFN	CERAMIC 25V 0.1	1	
C99		ECUX1E104ZFN	CERAMIC 25V 0.1	1	
			COILS		
L1		VLQEL05F331K	330uH	1	
L2		VLQEL05F101K	100uH	1	
			CRYSTAL OSCILLATOR		
X1		VSX0155		1	
			CONNECTORS		
P1		VJP1231T	4P	1	
P2		VJP1243T	3P	1	
P3		VJP1229R	2P	1	
P4		VJP1230T	3P	1	
P5		VJP1229T	2P	1	
P6		VJP1234T	7P	1	
			MISCELLANEOUS		
		VGQ0917	SHIELD PLATE	1	
	■	VJB26044	AUTO FOCUS SW C.B.		
			SWITCHES		
SW1		VSS0134		1	
SW2		EVQQSU05G		1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
			CONNECTOR		
P11		VJP1242T	2P	1	
	■	VJB20184	IR LED C.B.		
			DIODE		
		VLL0036	LED	1	
	■	VJB20183	PSD C.B.		
			PSD		
PD501		PN1361		1	
	■	VEP06336A	MAIN C.B.A.		
			(POWER,SERVO,SYSTEM		
			CONTROL)		
			(POWER SUPPLY SECTION)		
			INTEGRATED CIRCUITS		
IC1001		BA6149LS		1	
IC1002		UN102		1	
			TRANSISTORS		
Q1001		2SB709		1	(Q,R,S)
Q1002		2SB709		1	(Q,R,S)
Q1003		2SB709		1	(S)
Q1004		2SD1328		1	(S)
Q1005		2SD1328		1	(S)
Q1006		2SD1030		1	(S)
			DIODES		
D1001		MA151K		1	
D1002		MA306ZM		1	
			RESISTORS		
R1001		ERJ6GCYJ473	CHIP 47K	1	
R1002		ERJ6GCYJ222	CHIP 2.2K	1	
R1003		ERJ6GCYJ103	CHIP 10K	1	
R1004		ERJ6GCYJ222	CHIP 2.2K	1	
R1005		ERJ6GCYJ103	CHIP 10K	1	
R1006		ERJ6GCYJ472	CHIP 4.7K	1	
R1007		ERJ6GCYJ103	CHIP 10K	1	
R1008		ERJ6GCYJ154	CHIP 150K	1	
R1009		ERJ6GCYJ154	CHIP 150K	1	
R1010		ERJ6GCYJ472	CHIP 4.7K	1	
R1011		ERJ6GCYJ103	CHIP 10K	1	
R1012		ERDS2TJ122	1.2K	1	
R1013		ERDS2TJ122	1.2K	1	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
R1014	ERDS2TJ152	1.5K	1	
R1015	ERDS2TJ152	1.5K	1	
R1016	ERJ6GCYJ472	CHIP 4.7K	1	
R1017	ERJ6GCYJ103	CHIP 10K	1	
R1018	ERDS2TJ122	1.2K	1	
R1019	ERDS2TJ821	820	1	
R1020	ERJ6GCYJ153	CHIP 15K	1	
R1021	ERJ6GCYJ153	CHIP 15K	1	
R1022	ERJ6GCYJ681	CHIP 680	1	
R1023	ERJ6GCYJ681	CHIP 680	1	
R1024	ERJ6GCYJ393	CHIP 39K	1	
R1025	ERJ6GCYJ123	CHIP 12K	1	
R1026	ERJ6GCYJ391	CHIP 390	1	
R1027	ERJ6GCYJ391	CHIP 390	1	
R1028	ERJ6GCYJ391	CHIP 390	1	
R1029	ERJ6GCYJ391	CHIP 390	1	
R1030	ERJ6GCYJ391	CHIP 390	1	
R1031	ERJ6GCYJ391	CHIP 390	1	
R1032	ERJ6GCYJ102	CHIP 1K	1	
R1033	ERJ6GCYJ563	CHIP 56K	1	
R1034	ERJ6GCYJ123	CHIP 12K	1	
		CAPACITORS		
C1001	ECUX1H820JCN	CERAMIC 50V 82P	1	
C1002	ECUX1H561KBN	CERAMIC 50V 560P	1	
C1003	ECUX1H561KBN	CERAMIC 50V 560P	1	
C1004	ECEA1HKS010	ELECTROLYTIC 50V 1	1	
C1005	ECUX1E473ZFM	CERAMIC 25V 0.047	1	
C1006	ECUX1E473ZFM	CERAMIC 25V 0.047	1	
C1007	ECEA1CK101	ELECTROLYTIC 16V 100	1	
C1008	ECEA1HKSR47	ELECTROLYTIC 50V 0.47	1	
C1009	ECEA1HKS2R2	ELECTROLYTIC 50V 2.2	1	
C1010	ECEA1CK101	ELECTROLYTIC 16V 100	1	
C1011	ECUX1E473ZFM	CERAMIC 25V 0.047	1	
C1012	ECEA0JSS471	ELECTROLYTIC 6.3V 470	1	
C1015	ECEA1ASS331	ELECTROLYTIC 10V 330	1	
C1016	ECEA1AK221	ELECTROLYTIC 10V 330	1	
C1017	ECEA0JKS330	ELECTROLYTIC 6.3V 33	1	
C1018	ECUX1E473ZFM	CERAMIC 25V 0.047	1	
C1019	ECEA1AK221	ELECTROLYTIC 10V 220	1	
C1020	ECEA1CK101	ELECTROLYTIC 16V 100	1	
C1021	ECEA1CK101	ELECTROLYTIC 16V 100	1	
C1022	ECEA1CK101	ELECTROLYTIC 16V 100	1	
C1023	ECEA0JKS330	ELECTROLYTIC 6.3V 33	1	
C1024	ECUX1H103ZFM	CERAMIC 50V 0.01	1	
C1025	ECUX1H104ZFM	CERAMIC 25V 0.01	1	
		COILS		
L1001	ELCO8D011		1	OR ELCO8D022 <!>
L1002	ELCO8D010		1	OR ELCO8D021 <!>
L1003	VLQ0128	47uH	1	<!>
L1004	VLQ0128	47uH	1	<!>
L1005	ELCO8D015	400uH	1	OR ELCO8D023 <!>
L1006	VLQ0129	290uH	1	OR ELCO8D024 <!>
L1007	VLQ0129	290uH	1	OR ELCO8D024 <!>
L1008	VLQ0128	47uH	1	<!>
		CRYSTAL OSCILLATOR		
X1001	VSX0136		1	
		CONNECTORS		
P1001	VJP1230T	3P	1	
		VARIABLE RESISTORS		
VR1002	EVMLGGA00B14	10K	1	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
VR1003	EVML3GA00B14	10K	1	
		PROTECTORS		
PR1001	VSF0014A10		1	<!>
PR1002	VSF0014A08		1	<!>
		(SERVO SECTION)		
		INTEGRATED CIRCUITS		
IC2001	MN6179VBES		1	
IC2002	AN3792S		1	
IC2003	AN6562S		1	
IC2004	AN6562S		1	
IC2005	TA7745P		1	
IC2006	AN3821K		1	
IC2007	uPC1542AG		1	
		TRANSISTORS		
Q2001	2SD601		1	(Q,R,S)
Q2002	2SB709		1	(Q,R,S)
Q2003	2SD601		1	(Q,R,S)
Q2004	2SB709		1	(Q,R,S)
Q2005	2SB709		1	(Q,R,S)
Q2006	2SD601		1	(Q,R,S)
Q2007	2SB709		1	(Q,R,S)
Q2008	2SD601		1	(Q,R,S)
Q2009	2SB819		1	(R,S)
Q2010	2SB819		1	(R,S)
Q2011	2SB819		1	(R,S)
Q2012	2SD601		1	(Q,R,S)
Q2013	2SD601		1	(Q,R,S)
Q2014	2SD601		1	(Q,R,S)
Q2015	2SB709		1	(Q,R,S)
Q2016	2SD601		1	(Q,R,S)
Q2017	2SD601		1	(Q,R,S)
Q2018	2SD601		1	(Q,R,S)
		DIODES		
D2001	MA151WK		1	
D2002	MA151K		1	
D2003	MA153		1	
D2004	MA151K		1	
D2005	MA151WK		1	
D2006	MA151K		1	
D2007	MA153		1	
D2008	MA153		1	
		RESISTORS		
R2001	ERJ6GCYJ562	CHIP 5.6K	1	
R2002	ERJ6GCYJ333	CHIP 33K	1	
R2003	ERJ6GCYJ333	CHIP 33K	1	
R2004	ERJ6GCYJ154	CHIP 150K	1	
R2005	ERJ6GCYJ104	CHIP 100K	1	
R2006	ERJ6GCYJ154	CHIP 150K	1	
R2007	ERJ6GCYJ474	CHIP 470K	1	
R2008	ERJ6GCYJ823	CHIP 82K	1	
R2011	ERJ6GCYJ223	CHIP 22K	1	
R2012	ERJ6GCYJ103	CHIP 10K	1	
R2013	ERJ6GCYJ823	CHIP 82K	1	
R2014	ERJ6GCYJ273	CHIP 27K	1	
R2015	ERJ6GCYJ333	CHIP 33K	1	
R2016	ERJ6GCYJ473	CHIP 47K	1	
R2017	ERJ6GCYJ333	CHIP 33K	1	
R2018	ERJ6GCYJ102	CHIP 1K	1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
R2019		ERJ6GCYJ332	CHIP 3.3K	1	
R2020		ERJ6GCYJ222	CHIP 2.2K	1	
R2021		ERJ6GCYJ222	CHIP 2.2K	1	
R2022		ERJ6GCYJ224	CHIP 220K	1	
R2023		ERJ6GCYJ224	CHIP 220K	1	
R2024		ERJ6GCYJ563	CHIP 56K	1	
R2025		ERJ6GCYJ102	CHIP 1K	1	
R2026		ERJ6GCYJ223	CHIP 22K	1	
R2027		ERJ6GCYJ223	CHIP 22K	1	
R2028		ERJ6GCYJ683	CHIP 68K	1	
R2029		ERJ6GCYJ222	CHIP 2.2K	1	
R2030		ERJ6GCYJ103	CHIP 10K	1	
R2031		ERJ6GCYJ333	CHIP 33K	1	
R2032		ERJ6GCYJ394	CHIP 390K	1	
R2033		ERJ6GCYJ121	CHIP 120	1	
R2034		ERJ6GCYJ273	CHIP 27K	1	
R2035		ERJ6GCYJ101	CHIP 100	1	
R2036		ERJ6GCYJ222	CHIP 2.2K	1	
R2037		ERJ6GCYJ103	CHIP 10K	1	
R2038		ERJ6GCYJ103	CHIP 10K	1	
R2039		ERJ6GCYJ123	CHIP 12K	1	
R2040		ERJ6GCYJ103	CHIP 10K	1	
R2041		ERJ6GCYJ472	CHIP 4.7K	1	
R2042		ERJ6GCYJ333	CHIP 33K	1	
R2043		ERJ6GCYJ102	CHIP 1K	1	
R2044		ERJ6GCYJ183	CHIP 18K	1	
R2045		ERJ6GCYJ562	CHIP 5.6K	1	
R2046		ERJ6GCYJ104	CHIP 100K	1	
R2047		ERJ6GCYJ103	CHIP 10K	1	
R2048		ERJ6GCYJ223	CHIP 22K	1	
R2049		ERJ6GCYJ562	CHIP 5.6K	1	
R2050		ERJ6GCYJ683	CHIP 68K	1	
R2051		ERDS2TJR68	0.68	1	
R2052		ERJ6GCYJ224	CHIP 220K	1	
R2053		ERJ6GCYJ224	CHIP 220K	1	
R2054		ERJ6GCYJ224	CHIP 220K	1	
R2055		ERJ6GCYJ822	CHIP 8.2K	1	
R2056		ERJ6GCYJ561	CHIP 560	1	
R2057		ERJ6GCYJ392	CHIP 3.9K	1	
R2058		ERJ6GCYJ561	CHIP 560	1	
R2059		ERJ6GCYJ392	CHIP 3.9K	1	
R2060		ERJ6GCYJ561	CHIP 560	1	
R2061		ERJ6GCYJ392	CHIP 3.9K	1	
R2062		ERJ6GCYJ332	CHIP 3.3K	1	
R2063		ERJ6GCYJ223	CHIP 22K	1	
R2064		ERJ6GCYJ103	CHIP 10K	1	
R2065		ERJ6GCYJ102	CHIP 1K	1	
R2066		ERJ6GCYJ333	CHIP 33K	1	
R2067		ERJ6GCYJ561	CHIP 560	1	
R2068		ERJ6GCYJ103	CHIP 10K	1	
R2069		ERJ6GCYJ472	CHIP 4.7K	1	
R2070		ERJ6GCYJ103	CHIP 10K	1	
R2071		ERJ6GCYJ103	CHIP 10K	1	
R2072		ERJ6GCYJ332	CHIP 3.3K	1	
R2073		ERJ6GCYJ332	CHIP 3.3K	1	
R2074		ERJ6GCYJ332	CHIP 3.3K	1	
R2075		ERJ6GCYJ332	CHIP 3.3K	1	
R2076		ERJ6GCYJ103	CHIP 10K	1	
R2077		ERJ6GCYJ333	CHIP 33K	1	
R2078		ERJ6GCYJ103	CHIP 10K	1	
R2079		ERJ6GCYJ103	CHIP 10K	1	
R2080		ERJ6GCYJ103	CHIP 10K	1	
R2081		ERJ6GCYJ103	CHIP 10K	1	
R2082		ERJ6GCYJ821	CHIP 820	1	
R2083		ERJ6GCYJ151	CHIP 150	1	
R2084		ERJ6GCYJ151	CHIP 150	1	
R2085		ERJ6GCYJ102	CHIP 1K	1	
R2086		ERJ6GCYJ823	CHIP 82K	1	
R2087		ERDS1TJ1R0	1	1	
R2088		ERDS2TJ2R2	2.2	1	
R2089		ERJ6GCYJ333	CHIP 33K	1	
R2090		ERJ6GCYJ105	CHIP 1M	1	
R2091		ERJ6GCYJ104	CHIP 100K	1	
R2092		ERJ6GCYJ394	CHIP 390K	1	
R2093		ERJ6GCYJ104	CHIP 100K	1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
R2094		ERJ6GCYJ104	CHIP 100K	1	
R2095		ERJ6GCYJ333	CHIP 33K	1	
			CAPACITORS		
C2001		ECUX1H103ZFN	CERAMIC 50V 0.01	1	
C2002		ECUX1H472KBN	CERAMIC 50V 0.047	1	
C2003		ECEA1HKS010	ELECTROLYTIC 50V 1	1	
C2004		ECEA0JKS220	ELECTROLYTIC 6.3V 22	1	
C2005		ECEA0GKS470	ELECTROLYTIC 4V 47	1	
C2006		ECUX1E223ZFN	CERAMIC 25V 0.022	1	
C2007		ECWM1H273JZ	MYLAR 50V 0.027	1	
C2008		ECSF16ER33X1	TANTALUM 0.33	1	
C2009		ECUX1E473ZFN	CERAMIC 25V 0.047	1	
C2010		ECUX1E473ZFN	CERAMIC 25V 0.047	1	
C2011		ECUX1H332KBN	CERAMIC 50V 3300P	1	
C2012		ECUX1H472KBN	CERAMIC 50V 4700P	1	
C2013		ECWM1H152JZ	MYLAR 50V 1500P	1	
C2014		ECEA0GKS470	ELECTROLYTIC 4V 47	1	
C2015		ECEA0JKS470	ELECTROLYTIC 6.3V 47	1	
C2016		ECEA1CKS100	ELECTROLYTIC 16V 10	1	
C2017		ECEA1CKS100	ELECTROLYTIC 16V 10	1	
C2018		ECUX1H102KBN	CERAMIC 50V 1000P	1	
C2019		ECUX1H223ZFN	CERAMIC 50V 0.022	1	
C2020		ECEA0JKS470	ELECTROLYTIC 6.3V 47	1	
C2021		ECUX1E104ZFN	CERAMIC 25V 0.1	1	
C2022		ECEA1HKSR47	ELECTROLYTIC 50V 0.47	1	
C2023		ECEA1HKSR47	ELECTROLYTIC 50V 0.47	1	
C2024		ECEA1HKSR47	ELECTROLYTIC 50V 0.47	1	
C2025		ECUX1H472KBN	CERAMIC 50V 4700P	1	
C2026		ECUX1H472KBN	CERAMIC 50V 4700P	1	
C2027		ECUX1H472KBN	CERAMIC 50V 4700P	1	
C2028		ECEA0JKS470	ELECTROLYTIC 6.3V 47	1	
C2029		ECEA0JKS470	ELECTROLYTIC 6.3V 47	1	
C2030		ECEA0JKS220	ELECTROLYTIC 6.3V 22	1	
C2031		ECEA0JKS220	ELECTROLYTIC 6.3V 22	1	
C2032		ECUX1E473ZFN	CERAMIC 25V 0.047	1	
C2033		ECEA1VSN2R2	ELECTROLYTIC 35V 2.2	1	
C2034		ECUX1H222KBN	CERAMIC 50V 2200P	1	
C2035		ECEA1HKS010	ELECTROLYTIC 50V 1	1	
C2036		ECUX1H152KBN	CERAMIC 50V 1500P	1	
C2037		ECEA1HKN010	ELECTROLYTIC 50V 1	1	
C2038		ECEA1HKSR47	ELECTROLYTIC 50V 0.47	1	
C2039		ECUX1E104ZFN	CERAMIC 25V 0.1	1	
C2040		ECEA1HKS010	ELECTROLYTIC 50V 1	1	
C2041		ECUX1H472KBN	CERAMIC 50V 4700P	1	
C2042		ECUX1H472KBN	CERAMIC 50V 4700P	1	
C2043		ECUX1H472KBN	CERAMIC 50V 4700P	1	
C2044		ECEA1VSN2R2	ELECTROLYTIC 35V 2.2	1	
C2045		ECEA1VSN2R2	ELECTROLYTIC 35V 2.2	1	
C2046		ECEA1VSN2R2	ELECTROLYTIC 35V 2.2	1	
C2047		ECEA0JKS470	ELECTROLYTIC 6.3V 47	1	
C2048		ECEA1HKS010	ELECTROLYTIC 50V 1	1	
C2049		ECUX1H471KBN	CERAMIC 50V 470P	1	
C2050		ECQV1H393JZ	MYLAR 50V 0.039	1	
C2051		ECUX1E104ZFN	CERAMIC 25V 0.1	1	
C2052		ECEA1HKS010	ELECTROLYTIC 50V 1	1	
C2053		ECEA0GKS470	ELECTROLYTIC 4V 47	1	
C2054		ECEA0GKS470	ELECTROLYTIC 4V 47	1	
C2055		ECEA1HKS010	ELECTROLYTIC 50V 1	1	
C2056		ECEA1HKK010	ELECTROLYTIC 50V 1	1	
C2057		ECEA1HKS010	ELECTROLYTIC 50V 1	1	
C2058		ECEA1AKS470	ELECTROLYTIC 10V 47	1	
C2059		ECUX1H103ZFN	CERAMIC 50V 0.01	1	
C2060		ECUX1E104ZFN	CERAMIC 25V 0.1	1	
C2061		ECEA0JKS470	ELECTROLYTIC 6.3V 47	1	
C2062		ECEA0JKS470	ELECTROLYTIC 6.3V 47	1	
C2063		ECEA1CKS470	ELECTROLYTIC 16V 47	1	
C2064		ECEA1CKS470	ELECTROLYTIC 16V 47	1	
C2065		ECEA1HKSR47	ELECTROLYTIC 50V 0.47	1	
C2066		ECEA1HKSR47	ELECTROLYTIC 50V 0.47	1	
C2067		ECUX1E153KBN	CERAMIC 25V 0.015	1	
C2068		ECEA0GKS470	ELECTROLYTIC 4V 47	1	
C2069		ECEA0GKS470	ELECTROLYTIC 4V 47	1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
C2070		ECUX1E223ZFN	CERAMIC 25V 0.022	1	
C2071		ECEAOGKS470	ELECTROLYTIC 4V 47	1	
C2072		ECWM1H103JZ	MYLAR 50V 0.01	1	
			CONNECTORS		
P2001		VJP1608T	4P	1	
P2002		VJS1622	13P	1	
P2003		VJP1605T	12P	1	
P2004		VJP1599T	6P	1	
P2005		VJP1606T	2P	1	
P2006		VJP1596T	3P	1	
			VARIABLE RESISTORS		
VR2001		EVMLGGA00B15	100K	1	
VR2002		EVMLGGA00B15	100K	1	
			(SYSTEM CONTROL SECTION)		
			INTEGRATED CIRCUITS		
IC5001		AN6914S		1	
IC5002		MN1534VXQ		1	
IC5003		MN4066BS		1	
IC5004		AN6660		1	
IC5005		MN4503BS		1	
IC5006		MN1237A		1	
			TRANSISTORS		
Q6001		2SB709		1	(Q,R,S)
Q6002		2SD601		1	(Q,R,S)
Q6003		2SB710		1	(Q,R,S)
Q6004		2SB710		1	(Q,R,S)
Q6005		2SB710		1	(R,S)
Q6006		2SD636		1	(Q,R,S)
Q6007		2SD602		1	(Q,R,S)
Q6008		2SB779		1	(Q,R,S)
Q6009		2SD601		1	(Q,R,S)
Q6010		2SD601		1	(Q,R,S)
Q6011		2SB709		1	(Q,R,S)
Q6012		2SD601		1	(Q,R,S)
Q6013		2SD601		1	(Q,R,S)
			COMBINATION PARTS		
			(TRANSISTOR & RESISTOR)		
QR5001		UN2112		1	
QR6002		UN2212		1	
QR6004		UN2212		1	
QR6007		UN2212		1	
QR6009		UN2112		1	
QR6010		UN2212		1	
QR6011		UN2212		1	
QR6012		UN2212		1	
QR6013		UN2112		1	
QR6014		UN2112		1	
QR6015		UN2112		1	
QR6016		UN2112		1	
QR6018		UN2113		1	
QR6020		UN2113		1	
QR6021		UN2212		1	
QR6022		UN2212		1	
QR6023		UN2212		1	
QR6024		UN2212		1	
QR6025		UN2212		1	
QR6026		UN2212		1	
QR6027		UN2212		1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
QR6028		UN2212		1	
QR6029		UN2212		1	
QR6030		UN2212		1	
QR6031		UN2212		1	
			DIODES		
D6001		MA151K		1	
D6005		MA3075M		1	
D6006		MA3068H		1	
D6007		MA151WK		1	
D6008		MA151WA		1	
D6009		MA151WA		1	
D6010		MA151WA		1	
D6011		MA151WA		1	
D6012		MA151WA		1	
D6013		MA151K		1	
D6014		MA151K		1	
D6015		MA151K		1	
D6017		MA151K		1	
D6019		MA151WA		1	
D6020		MA151WA		1	
			RESISTORS		
R6001		ERJ6GCYJ332	CHIP 3.3K	1	
R6002		ERJ6GCYJ562	CHIP 5.6K	1	
R6003		ERJ6GCYJ102	CHIP 1K	1	
R6004		ERJ6GCYJ104	CHIP 100K	1	
R6005		ERJ6GCYJ102	CHIP 1K	1	
R6007		ERJ6GCYJ103	CHIP 10K	1	
R6008		ERJ6GCYJ103	CHIP 10K	1	
R6009		ERJ6GCYJ104	CHIP 100K	1	
R6010		ERJ6GCYJ563	CHIP 56K	1	
R6011		ERJ6GCYJ102	CHIP 1K	1	
R6012		ERJ6GCYJ563	CHIP 56K	1	
R6013		ERJ6GCYJ273	CHIP 27K	1	
R6014		ERJ6GCYJ683	CHIP 68K	1	
R6015		ERJ6GCYJ333	CHIP 33K	1	
R6016		ERJ6GCYJ683	CHIP 68K	1	
R6017		ERJ6GCYJ223	CHIP 22K	1	
R6018		ERJ6GCYJ184	CHIP 180K	1	
R6019		ERJ6GCYJ474	CHIP 470K	1	
R6020		ERX1SJ2R2	METAL 1/2W 2.2	1	
R6024		ERJ6GCYJ152	CHIP 1.5K	1	
R6025		ERJ6GCYJ152	CHIP 1.5K	1	
R6026		ERJ6GCYJ562	CHIP 5.6K	1	
R6028		ERJ6GCYJ182	CHIP 1.8K	1	
R6029		ERJ6GCYJ152	CHIP 1.5K	1	
R6030		ERJ6GCYJ182	CHIP 1.8K	1	
R6031		ERJ6GCYJ152	CHIP 1.5K	1	
R6033		ERJ6GCYJ103	CHIP 10K	1	
R6034		ERJ6GCYJ272	CHIP 2.7K	1	
R6035		ERJ6GCYJ222	CHIP 2.2K	1	
R6036		ERJ6GCYJ222	CHIP 2.2K	1	
R6037		ERJ6GCYJ102	CHIP 1K	1	
R6038		ERJ6GCYJ102	CHIP 1K	1	
R6039		ERJ6GCYJ104	CHIP 100K	1	
R6040		ERJ6GCYJ104	CHIP 100K	1	
R6041		ERJ6GCYJ562	CHIP 5.6K	1	
R6042		ERJ6GCYJ562	CHIP 5.6K	1	
R6043		ERJ6GCYJ562	CHIP 5.6K	1	
R6044		ERJ6GCYJ291	CHIP 290	1	
R6045		ERJ6GCYJ102	CHIP 1K	1	
R6046		ERJ6GCYJ103	CHIP 10K	1	
R6047		ERG1ANJ820	METAL 1W 82	1	
R6048		ERJ6GCYJ102	CHIP 1K	1	
R6049		ERJ6GCYJ103	CHIP 10K	1	
R6050		ERJ6GCYJ222	CHIP 2.2K	1	
R6051		ERJ6GCYJ222	CHIP 2.2K	1	
R6052		ERJ6GCYJ561	CHIP 560	1	
R6053		ERJ6GCYJ561	CHIP 560	1	
R6054		ERJ6GCYJ104	CHIP 100K	1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
R6056		ERJ6GCYJ104	CHIP 100K	1	
R6057		ERJ6GCYJ222	CHIP 2.2K	1	
R6058		ERJ6GCYJ222	CHIP 2.2K	1	
R6059		ERJ6GCYJ183	CHIP 18K	1	
R6060		ERJ6GCYJ100	CHIP 100	1	
R6061		ERJ6GCYJ682	CHIP 6.8K	1	
R6062		ERJ6GCYJ562	CHIP 5.6K	1	
R6063		ERJ6GCYJ270	CHIP 270	1	
R6064		ERJ6GCYJ103	CHIP 10K	1	
R6065		ERJ6GCYJ223	CHIP 22K	1	
R6066		ERJ6GCYJ563	CHIP 56K	1	
R6067		ERJ6GCYJ103	CHIP 10K	1	
R6068		ERJ6GCYJ105	CHIP 1M	1	
R6069		ERJ6GCYJ104	CHIP 100K	1	
R6070		ERJ6GCYJ223	CHIP 22K	1	
R6071		ERJ6GCYJ223	CHIP 22K	1	
R6072		ERJ6GCYJ104	CHIP 100K	1	
R6073		ERJ6GCYJ564	CHIP 560K	1	
R6074		ERJ6GCYJ223	CHIP 22K	1	
R6075		ERJ6GCYJ104	CHIP 100K	1	
R6076		ERJ6GCYJ334	CHIP 33K	1	
R6077		ERJ6GCYJ123	CHIP 12K	1	
R6078		ERJ6GCYJ103	CHIP 10K	1	
R6079		ERJ6GCYJ274	CHIP 270K	1	
R6080		ERJ6GCYJ104	CHIP 100K	1	
R6081		ERJ6GCYJ103	CHIP 10K	1	
R6082		ERJ6GCYJ104	CHIP 100K	1	
R6083		ERJ6GCYJ104	CHIP 100K	1	
R6084		ERJ6GCYJ103	CHIP 10K	1	
R6085		ERJ6GCYJ103	CHIP 10K	1	
R6086		ERJ6GCYJ103	CHIP 10K	1	
R6087		ERJ6GCYJ103	CHIP 10K	1	
R6088		ERJ6GCYJ683	CHIP 68K	1	
R6089		ERJ6GCYJ103	CHIP 10K	1	
R6090		ERJ6GCYJ103	CHIP 10K	1	
R6091		ERJ6GCYJ102	CHIP 1K	1	
R6092		ERJ6GCYJ102	CHIP 1K	1	
R6093		ERJ6GCYJ102	CHIP 1K	1	
			CAPACTIORS		
C6001		ECEA1EKS220	ELECTROLYTIC 25V 22	1	
C6002		ECUX1E104ZFN	CERAMIC 25V 0.1	1	
C6003		ECEA1CKS100	ELECTROLYTIC 16V 10	1	
C6004		ECEA1HKS2R2	ELECTROLYTIC 50V 2.2	1	
C6005		ECEA1HKS010	ELECTROLYTIC 50V 1	1	
C6006		ECUX1E104ZFN	CERAMIC 25V 0.1	1	
C6007		ECUX1E104ZFN	CERAMIC 25V 0.1	1	
C6008		ECUX1E104ZFN	CERAMIC 25V 0.1	1	
C6009		ECUX1H562KBN	CERAMIC 50V 5600P	1	
C6010		ECUX1H220JCN	CERAMIC 50V 22P	1	
C6011		ECUX1H103ZFN	CERAMIC 50V 0.01	1	
C6012		VCE0017		1	OR EECF5R5U473
C6013		ECEA1HKS010	ELECTROLYTIC 50V 1	1	
C6014		ECEA1HKS010	ELECTROLYTIC 50V 1	1	
C6015		ECUX1H180JCN	CERAMIC 50V 18P	1	
C6016		ECUX1H180JCN	CERAMIC 50V 18P	1	
C6017		ECUX1E104ZFN	CERAMIC 25V 0.1	1	
C6018		ECEA0JKS470	ELECTROLYTIC 6.3V 47	1	
C6019		ECUX1E104ZFN	CERAMIC 25V 0.1	1	
C6020		ECUX1H103ZFN	CERAMIC 50V 0.01	1	
C6021		ECEA0JKS470	ELECTROLYTIC 6.3V 47	1	
C6022		ECUX1E104ZFN	CERAMIC 25V 0.1	1	
C6023		ECQV1H104JZ	MYLAR 50V 0.1	1	
C6024		ECEA1AKS330	ELECTROLYTIC 100V 33	1	
			COILS		
L6001		VLQEL05F101K	100uH	1	
L6002		VLQEL05F101K	100uH	1	
			FILTERS		

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
FJ6001		VJR0174	RT TERMINAL	1	
FJ6002		VJR0174	RT TERMINAL	1	
			CRYSTAL OSCILLATOR		
X6001		VSX0086		1	
			CONNECTORS		
P6001		VJS1703		1	
P6002		VJP1244T	4P	1	
P6003		VJP1606T	2P	1	
P6004		VJP1607T		1	
P6005		VJP1242T	2P	1	
P6006		VJP1607R		1	
P6007		VJP1611T	7P	1	
P6008		VJP1616T	12P	1	
P6009		VJP1230T	3P	1	
P6010		VJP1600T	7P	1	
P6011		VJP1236T	9P	1	
P6012		VJP1603T	10P	1	
P6013		VJP1607T	3P	1	
			VARIABLE RESISTORS		
VR6001		EVMLGGA00B14	10K	1	
VR6002		EVMLGGA00B23	2K	1	
			MISCELLANEOUS		
		VJF0304	CLAMPER	1	
		VMX0965	INSULATION PLATE	1	
		VSCS073	SHIELD CASE	1	
		VSC1356	SHIELD CASE	1	
		VSC1357	SHIELD CASE	1	
		VSC1358	SHIELD CASE	1	
		VSC1538	SHIELD CASE	1	
		VM20651	SHIELD CASE BARRIER	1	
		VWJ0219	FLEXIBLE CONNECTOR	1	
	■	VEP03297A	LUMINANCE/CHROMINANCE		
			C.B.A.		
			(LUMINANCE SECTION)		
			P.C.B.ASS'Y		
IC3001		VEFY007		1	
			TRANSISTORS		
Q3001		2SC1621		1	
Q3002		2SD602		1	(Q,R,S)
Q3003		2SB710		1	(Q,R,S)
Q3004		2SD601		1	(Q,R,S)
Q3005		2SC2404		1	(C,D)
Q3006		2SC2404		1	(C,D)
Q3007		2SC1621		1	
Q3008		2SD602		1	(Q,R,S)
Q3009		2SB710		1	(Q,R,S)
Q3010		2SB709		1	(Q,R,S)
Q3011		2SD601		1	(Q,R,S)
Q3012		2SC1621		1	
Q3013		2SB709		1	(Q,R,S)
Q3014		2SD601		1	(Q,R,S)
Q3015		2SD601		1	(Q,R,S)

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
		COMBINATION PART		
		(TRANSISTOR & RESISTOR)		
QR3001	UN2212		1	
		DIODE		
D3001	MA151K		1	
		RESISTORS		
R3001	ERJ6GCYG561	CHIP 560	1	
R3002	ERJ6GCYG102	CHIP 1K	1	
R3003	ERJ6GCYJ103	CHIP 10K	1	
R3004	ERJ6GCYJ561	CHIP 560	1	
R3005	ERJ6GCYJ183	CHIP 18K	1	
R3006	ERJ6GCYJ183	CHIP 18K	1	
R3007	ERJ6GCYJ682	CHIP 6.8K	1	
R3008	ERJ6GCYJ152	CHIP 1.5K	1	
R3009	ERJ6GCYJ681	CHIP 680	1	
R3010	ERJ6GCYJ472	CHIP 4.7K	1	
R3011	ERJ6GCYG182	CHIP 1.8K	1	
R3012	ERJ6GCYG331	CHIP 330	1	
R3013	ERJ6GCYJ102	CHIP 1K	1	
R3014	ERJ6GCYJ102	CHIP 1K	1	
R3015	ERJ6GCYJ563	CHIP 56K	1	
R3016	ERJ6GCYJ473	CHIP 47K	1	
R3018	ERJ6GCYJ681	CHIP 680	1	
R3019	ERJ6GCYJ474	CHIP 470K	1	
R3020	ERJ6GCYJ394	CHIP 390K	1	
R3021	ERJ6GCYJ103	CHIP 10K	1	
R3022	ERJ6GCYJ562	CHIP 5.6K	1	
R3023	ERJ6GCYJ152	CHIP 1.5K	1	
R3024	ERJ6GCYJ562	CHIP 5.6K	1	
R3025	ERJ6GCYJ221	CHIP 220	1	
R3026	ERJ6GCYJ681	CHIP 680	1	
R3027	ERJ6GCYJ682	CHIP 6.8K	1	
R3028	ERJ6GCYJ222	CHIP 2.2K	1	
R3029	ERJ6GCYJ681	CHIP 680	1	
R3030	ERJ6GCYJ560	CHIP 56	1	
R3031	ERJ6GCYJ331	CHIP 330	1	
R3032	ERJ6GCYJ271	CHIP 270	1	
R3035	ERJ6GCYJ682	CHIP 6.8K	1	
R3036	ERJ6GCYJ682	CHIP 6.8K	1	
R3037	ERJ6GCYJ270	CHIP 27	1	
R3038	ERJ6GCYJ270	CHIP 27	1	
R3039	ERJ6GCYJ104	CHIP 100K	1	
R3040	ERJ6GCYJ472	CHIP 4.7K	1	
R3041	ERJ6GCYJ681	CHIP 680	1	
R3042	ERJ6GCYJ563	CHIP 56K	1	
R3043	ERJ6GCYJ392	CHIP 3.9K	1	
R3044	ERJ6GCYG103	CHIP 10K	1	
R3045	ERJ6GCYG272	CHIP 2.7K	1	
R3047	ERJ6GCYJ821	CHIP 820	1	
R3048	ERJ6GCYJ681	CHIP 680	1	
R3049	ERJ6GCYJ123	CHIP 12K	1	
R3050	ERJ6GCYJ750	CHIP 75	1	
R3051	ERJ6GCYG562	CHIP 5.6K	1	
R3052	ERJ6GCYG103	CHIP 10K	1	
R3053	ERJ6GCYJ392	CHIP 3.9K	1	
R3054	ERJ6GCYJ563	CHIP 56K	1	
R3055	ERJ6GCYJ682	CHIP 6.8K	1	
R3056	ERJ6GCYJ822	CHIP 8.2K	1	
R3057	ERJ6GCYJ471	CHIP 470	1	
R3058	ERJ6GCYJ152	CHIP 1.5K	1	
R3059	ERJ6GCYJ471	CHIP 470	1	
R3060	ERJ6GCYJ332	CHIP 3.3K	1	
R3061	ERJ6GCYJ823	CHIP 82K	1	
		CAPACITORS		
C3001	ECEAOJU221	ELECTROLYTIC 6.3V 220	1	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
C3002	ECUX1H103ZFN	CERAMIC 50V 0.01	1	
C3003	ECEAOJU221	ELECTROLYTIC 6.3V 220	1	
C3004	ECUX1H030CCN	CERAMIC 50V 3P	1	
C3005	ECEA1EK2R2	ELECTROLYTIC 25V 2.2	1	
C3006	ECEA1EK3R3	ELECTROLYTIC 25V 3.3	1	
C3007	ECEAOGK220	ELECTROLYTIC 4V 22	1	
C3008	ECEA1EK3R3	ELECTROLYTIC 25V 3.3	1	
C3009	ECEAOJK220	ELECTROLYTIC 6.3V 22	1	
C3010	ECUX1H181JCN	CERAMIC 50V 180P	1	
C3011	ECUX1H680JCN	CERAMIC 50V 68P	1	
C3012	ECEA1EKS3R3	ELECTROLYTIC 25V 3.3	1	
C3013	ECEA1AKS330	ELECTROLYTIC 10V 3.3	1	
C3014	ECUX1H220JCN	CERAMIC 50V 22	1	
C3015	ECEAOJK221	ELECTROLYTIC 6.3V 220	1	
C3016	ECEAOGKS221	ELECTROLYTIC 4V 220	1	
C3017	ECEAOJKS220	ELECTROLYTIC 6.3V 22	1	
C3018	ECEAOJKS470	ELECTROLYTIC 6.3V 47	1	
C3019	ECUX1H150JCN	CERAMIC 50V 15P	1	
C3021	ECEA1CK100	ELECTROLYTIC 16V 10	1	
C3022	ECUX1H103ZFN	CERAMIC 50V 0.01	1	
C3023	ECEA1CKS100	ELECTROLYTIC 50V 10	1	
C3024	ECUX1H181JCN	CERAMIC 50V 180	1	
C3026	ECEA1HKS010	ELECTROLYTIC 50V 1	1	
C3027	ECUX1H681KBN	CERAMIC 50V 680P	1	
C3028	ECUX1E103KBN	CERAMIC 25V 0.01	1	
C3029	ECUX1H150JCN	CERAMIC 50V 15P	1	
C3030	ECUX1E103KBN	CERAMIC 25V 0.01	1	
C3031	ECUX1H103ZFN	CERAMIC 25V 0.01	1	
C3034	ECEA1CK100	ELECTROLYTIC 16V 10	1	
C3035	ECEVOJK220	ELECTROLYTIC 6.3V 22	1	
C3036	ECUX1H220JCN	CERAMIC 50V 22P	1	
C3037	ECEB1CK100	ELECTROLYTIC 16V 10	1	
C3038	ECEA1CKS100	ELECTROLYTIC 16V 10	1	
C3039	ECEA1CSN100	ELECTROLYTIC 16V 10	1	
C3040	ECUX1H681JN	CERAMIC 50V 680P	1	
C3042	ECUX1H103ZFN	CERAMIC 50V 0.01	1	
C3043	ECUX1H180JCN	CERAMIC 50V 18P	1	
		COILS		
L3001	VLQEL05F101K	100uH	1	
L3002	VLQ0163K150	15uH	1	OR ELJFA150KF
L3003	VLQ0163K150	12uH	1	OR ELJFA150KF
L3004	VLQEL05F101K	100uH	1	
L3007	VLQEL05F560K	56uH	1	
L3008	VLQEL05F101K	100uH	1	
L3009	VLQEL05F101K	100uH	1	
L3010	VLQ0163K120	12uH	1	OR ELJFA120KF
L3011	VLQEL05F101K	100uH	1	
L3012	VLQ0163J560	56uH	1	
L3013	VLQ0163J680	68uH	1	OR ELJFA680JF
		DELAY LINE		
DL3001	EFDVN645A43D		1	
		FILTERS		
FL3001	ELB4S002		1	
FL3002	ELB4P003		1	
FL3003	ELB4P003		1	
		CONNECTORS		
P3001	VJP1231T	4P	1	
P3002	VJP1595T	2P	1	
P3003	VJP1605R	12P	1	
P3004	VJP1601T	8P	1	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
		VARIABLE RESISTORS		
VR3001	EVMLGGA00B23	2K	1	
		(CHROMINANCE SECTION)		
		P.C.B.ASS'Y		
IC8001	VEPC009		1	
		TRANSISTORS		
Q8001	2SB709		1	(Q,R,S)
Q8004	2SD601		1	(Q,R,S)
Q8006	2SC1621		1	(Q,R,S)
		COMBINATION PARTS		
		(TRANSISTOR & RESISTOR)		
QR8001	UN2213		1	
QR8002	UN2217		1	
QR8003	UN2217		1	
		RESISTORS		
R8001	ERJ6GCYJ562	CHIP 5.6K	1	
R8002	ERJ6GCYJ102	CHIP 1K	1	
R8004	ERJ6GCYJ821	CHIP 820	1	
R8005	ERJ6GCYJ122	CHIP 1.2K	1	
R8006	ERJ6GCYJ102	CHIP 1K	1	
R8008	ERJ6GCYJ271	CHIP 270	1	
R8013	ERJ6GCYJ471	CHIP 470	1	
R8015	ERJ6GCYJ821	CHIP 820	1	
R8016	ERJ6GCYJ472	CHIP 4.7K	1	
R8017	ERJ8GCYJ470	CHIP 47	1	
R8018	ERJ6GCYJ182	CHIP 1.8K	1	
R8021	ERJ6GCYJ561	CHIP 560	1	
R8022	ERJ6GCYJ681	CHIP 680	1	
R8024	ERJ6GCYJ105	CHIP 1M	1	
R8025	ERJ6GCYJ123	CHIP 12K	1	
R8026	ERJ6GCYJ562	CHIP 5.6K	1	
R8027	ERJ6GCYJ123	CHIP 12K	1	
R8028	ERJ6GCYJ103	CHIP 10K	1	
R8029	ERJ6GCYJ273	CHIP 27K	1	
R8030	ERJ6GCYJ562	CHIP 5.6K	1	
R8031	ERJ6GCYJ563	CHIP 56K	1	
R8032	ERJ6GCYJ272	CHIP 2.7K	1	
R8034	ERJ6GCYJ102	CHIP 1K	1	
R8035	ERJ6GCYJ561	CHIP 560	1	
		CAPACITORS		
C8001	ECUX1H103ZFN	CERAMIC 50V 0.01	1	
C8002	ECQB1H223JH	MYLAR 50V 0.022	1	
C8003	ECEA0JK470	ELECTROLYTIC 6.3V 47	1	
C8004	ECUX1H103ZFN	CERAMIC 50V 0.01	1	
C8005	ECEA0GK470	ELECTROLYTIC 4V 47	1	
C8006	ECUX1H030CCN	CERAMIC 50V 3	1	
C8007	ECUX1E102JN	CERAMIC 25V 1000P	1	
C8009	ECEA0JU471	ELECTROLYTIC 6.3V 470	1	
C8010	ECUX1H103ZFN	CERAMIC 50V 0.01	1	
C8011	ECEA0JK470	ELECTROLYTIC 6.3V 47	1	
C8012	ECUX1H103ZFN	CERAMIC 50V 0.01	1	
C8013	ECEA1CKK100	ELECTROLYTIC 16V 10	1	
C8014	ECEA1EKK2R2	ELECTROLYTIC 25V 2.2	1	
C8017	ECUX1H103ZFN	CERAMIC 50V 0.01	1	
C8021	ECUX1H103ZFN	CERAMIC 50V 0.01	1	
C8022	ECUX1H103ZFN	CERAMIC 50V 0.01	1	
C8024	ECUX1H103ZFN	CERAMIC 50V 0.01	1	

Ref.No.	Part No.	Part Name & Description	Pcs	Remarks
		COILS		
L8001	VLQ0163K150	15uH	1	OR ELJFA150KA
L8002	VLQEL05F101K	100uH	1	
L8003	VLQEL05F101K	100uH	1	
L8004	VLQEL05F470K	47uH	1	
		DELAY LINE		
DL8001	VLD0074		1	
		FILTERS		
FL8001	ELB4Q013		1	
FL8002	ELB4Q004		1	
FL8003	ELB4Q005		1	
		CRYSTAL OSCILLATOR		
X8001	VSX0132		1	
		MISCELLANEOU		
	VMX0853	CUSHION	1	
	VEP05073B	HEAD AMP C.B.A.		
		INTEGRATED CIRCUIT		
IC5001	AN3311K		1	
		TRANSISTORS		
Q5001	2SC2404		1	(C,D)
Q5002	2SD601		1	(Q,R,S)
Q5003	2SD601		1	(Q,R,S)
Q5004	2SD601		1	(Q,R,S)
Q5005	2SD601		1	(Q,R,S)
Q5006	2SD1328		1	(S)
Q5007	2SB709		1	(Q,R,S)
Q5010	2SD601		1	(Q,R,S)
Q5011	2SD1328		1	(S)
Q5012	2SB709		1	(Q,R,S)
Q5015	2SD601		1	(Q,R,S)
Q5016	2SD1328		1	(S)
Q5017	2SB709		1	(Q,R,S)
Q5020	2SD601		1	(Q,R,S)
Q5021	2SD1328		1	(S)
Q5022	2SB709		1	(Q,R,S)
		COMBINATION PARTS		
		(TRANSISTOR & RESISTOR)		
QR5001	UN2111		1	
QR5002	UN2213		1	
QR5003	UN2111		1	
QR5004	UN2213		1	
QR5005	UN2111		1	
QR5006	UN2213		1	
QR5007	UN2111		1	
QR5008	UN2213		1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
			RESISTORS		
R5001		ERJ6GCYJ332	CHIP 3.3K	1	
R5002		ERJ6GCYJ332	CHIP 3.3K	1	
R5003		ERJ6GCYJ332	CHIP 3.3K	1	
R5004		ERJ6GCYJ332	CHIP 3.3K	1	
R5006		ERJ6GCYJ182	CHIP 1.8K	1	
R5007		ERJ6GCYJ102	CHIP 1K	1	
R5008		ERJ6GCYJ681	CHIP 680	1	
R5009		ERJ6GCYJ102	CHIP 1K	1	
R5011		ERJ6GCYJ102	CHIP 1K	1	
R5012		ERJ6GCYJ121	CHIP 120	1	
R5013		ERJ6GCYJ102	CHIP 1K	1	
R5014		ERJ6GCYJ681	CHIP 680	1	
R5015		ERJ6GCYJ821	CHIP 820	1	
R5016		ERJ6GCYJ102	CHIP 1K	1	
R5017		ERJ6GCYJ103	CHIP 10K	1	
R5018		ERJ6GCYJ103	CHIP 10K	1	
R5019		ERJ6GCYJ102	CHIP 1K	1	
R5020		ERJ6GCYJ102	CHIP 1K	1	
R5021		ERJ6GCYJ220	CHIP 22	1	
R5022		ERJ6GCYJ332	CHIP 3.3K	1	
R5024		ERJ6GCYJ332	CHIP 3.3K	1	
R5025		ERJ6GCYJ332	CHIP 3.3K	1	
R5026		ERJ6GCYJ222	CHIP 2.2K	1	
R5027		ERJ6GCYJ152	CHIP 1.5K	1	
R5028		ERJ6GCYJ272	CHIP 2.7K	1	
R5031		ERJ6GCYJ220	CHIP 22	1	
R5032		ERJ6GCYJ332	CHIP 3.3K	1	
R5034		ERJ6GCYJ332	CHIP 3.3K	1	
R5035		ERJ6GCYJ332	CHIP 3.3K	1	
R5036		ERJ6GCYJ222	CHIP 2.2K	1	
R5037		ERJ6GCYJ152	CHIP 1.5K	1	
R5038		ERJ6GCYJ272	CHIP 2.7K	1	
R5041		ERJ6GCYJ220	CHIP 22	1	
R5042		ERJ6GCYJ332	CHIP 3.3K	1	
R5044		ERJ6GCYJ332	CHIP 3.3K	1	
R5045		ERJ6GCYJ332	CHIP 3.3K	1	
R5046		ERJ6GCYJ222	CHIP 2.2K	1	
R5047		ERJ6GCYJ152	CHIP 1.5K	1	
R5048		ERJ6GCYJ272	CHIP 2.7K	1	
R5051		ERJ6GCYJ220	CHIP 22	1	
R5052		ERJ6GCYJ332	CHIP 3.3K	1	
R5054		ERJ6GCYJ332	CHIP 3.3K	1	
R5055		ERJ6GCYJ332	CHIP 3.3K	1	
R5056		ERJ6GCYJ222	CHIP 2.2K	1	
R5057		ERJ6GCYJ152	CHIP 1.5K	1	
R5058		ERJ6GCYJ272	CHIP 2.7K	1	
			VARIABLE RESISTOR		
VR5001		EVMLGGA00B13	1K	1	
			CAPACITORS		
C5001		ECSF1CE105	TANTALUM 16V 1	1	
C5002		ECSF1CE105	TANTALUM 16V 1	1	
C5003		ECSF1CE105	TANTALUM 16V 1	1	
C5004		ECSF1CE105	TANTALUM 16V 1	1	
C5005		ECEA1CKK100	ELECTROLYTIC 16V 10	1	
C5006		ECEA1CKK100	ELECTROLYTIC 16V 10	1	
C5007		ECEA1CKK100	ELECTROLYTIC 16V 10	1	
C5008		ECEA1CKK100	ELECTROLYTIC 16V 10	1	
C5009		ECUX1H101JCN	CERAMIC 50V 100P	1	
C5010		ECUX1H101JCN	CERAMIC 50V 100P	1	
C5011		ECUX1H101JCN	CERAMIC 50V 100P	1	
C5012		ECUX1H101JCN	CERAMIC 50V 100P	1	
C5013		ECUX1H103ZFN	CERAMIC 50V 0.01	1	
C5014		ECUX1H103ZFN	CERAMIC 50V 0.01	1	
C5015		ECUX1H103ZFN	CERAMIC 50V 0.01	1	
C5016		ECUX1H103ZFN	CERAMIC 50V 0.01	1	
C5017		ECEA0JKS470	ELECTROLYTIC 6.3V 47	1	
C5018		ECUX1H270JCN	CERAMIC 50V 27P	1	
C5019		ECUX1H391JN	CERAMIC 50V 390P	1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
C5020		ECUX1H151JCN	CERAMIC 50V 150P	1	
C5021		ECEA1HKK010	ELECTROLYTIC 50V 1	1	
C5022		ECUX1H820JCN	CERAMIC 50V 82P	1	
C5023		ECUX1H330JCN	CERAMIC 50V 33P	1	
C5024		ECUX1H103ZFN	CERAMIC 50V 0.01	1	
C5025		ECSF1VE154	TANTALUM 35V 0.15	1	
C5026		ECUX1E103KBN	CERAMIC 25V 0.01	1	
C5028		ECUX1E103KBN	CERAMIC 25V 0.01	1	
C5029		ECUX1H390JCN	CERAMIC 50V 39P	1	
C5030		ECEA0JKS101	ELECTROLYTIC 6.3V 100	1	
C5031		ECUX1H103ZFN	CERAMIC 50V 0.01	1	
C5032		ECUX1E104ZFN	CERAMIC 25V 0.1	1	
C5035		ECUX1H101JCN	CERAMIC 50V 100P	1	
C5036		ECUX1H101JCN	CERAMIC 50V 100P	1	
C5037		ECUX1H101JCN	CERAMIC 50V 100P	1	
C5038		ECUX1H101JCN	CERAMIC 50V 100P	1	
C5039		ECUX1E473ZFN	CERAMIC 25V 0.047	1	
C5040		ECUX1E473ZFN	CERAMIC 25V 0.047	1	
C5041		ECUX1E473ZFN	CERAMIC 25V 0.047	1	
C5042		ECUX1E473ZFN	CERAMIC 25V 0.047	1	
C5043		ECUX1H103ZFN	CERAMIC 50 0.01	1	
			COILS		
L5001		VLF0365		1	
L5002		VLF0365		1	
L5003		VLF0365		1	
L5004		VLF0365		1	
L5005		VLQ0163J330	33uH	1	
L5006		VLQ0163K180	18uH	1	
L5007		VLQEL05F151K	150uH	1	
L5008		VLQ0163J150	15uH	1	
L5009		VLQEL05F101K	100uH	1	
L5010		VLQEL05F101K	100uH	1	
L5011		VLQ0163K220	22uH	1	
L5012		VLQEL05F681K	680uH	1	
			FILTERS		
FL5001		ELB4P001		1	
			CONNECTORS		
P5001		VJP1237T	10P	1	
P5002		VJP1601T	8P	1	
P5003		VJP1599T	6P	1	
	■	VEP04131B	AUDUO C.B.A.		
			INTEGRATED CIRCUITS		
IC4001		uPC1513G		1	
IC4002		uPC1514G		1	
IC4003		M5201L		1	
			TRANSISTORS		
Q4001		2SD602		1	(R,S)
Q4002		2SD601		1	(Q,R,S)
Q4003		2SD1030		1	(S)
			DIODE		
D4001		MA151A		1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
			RESISTORS		
R4001		ERJ6GCYJ100	CHIP 10	1	
R4002		ERJ6GCYJ183	CHIP 18K	1	
R4003		ERJ6GCYJ151	CHIP 150	1	
R4004		ERJ6GCYJ184	CHIP 180K	1	
R4005		ERJ6GCYJ332	CHIP 3.3K	1	
R4006		ERJ6GCYJ122	CHIP 1.2K	1	
R4008		ERJ6GCYJ333	CHIP 33K	1	
R4010		ERJ6GCYJ822	CHIP 8.2K	1	
R4011		ERJ6GCYJ682	CHIP 6.8K	1	
R4012		ERJ6GCYJ333	CHIP 33K	1	
R4013		ERJ6GCYJ105	CHIP 1M	1	
R4014		ERJ6GCYJ101	CHIP 100	1	
R4015		ERJ6GCYJ122	CHIP 1.2K	1	
R4016		ERJ6GCYJ153	CHIP 15K	1	
R4017		ERJ6GCYJ103	CHIP 10K	1	
R4018		ERJ6GCYJ473	CHIP 47K	1	
R4019		ERJ6GCYJ103	CHIP 10K	1	
R4020		ERJ6GCYJ273	CHIP 27K	1	
R4021		ERJ6GCYJ682	CHIP 6.8K	1	
R4022		ERJ6GCYJ473	CHIP 47K	1	
R4023		ERJ6GCYJ473	CHIP 47K	1	
R4024		ERJ6GCYJ124	CHIP 120K	1	
R4025		ERJ6GCYJ563	CHIP 56K	1	
R4026		ERJ6GCYJ123	CHIP 12K	1	
R4027		ERJ6GCYJ273	CHIP 27K	1	
R4028		ERJ6GCYJ681	CHIP 680	1	
R4029		ERJ6GCYJ124	CHIP 120K	1	
R4030		ERDS2TJ273	27K	1	
R4031		ERJ6GCYJ561	CHIP 560	1	
R4032		ERJ6GCYJ561	CHIP 560	1	
R4033		ERJ6GCYJ122	CHIP 1.2K	1	
R4034		ERJ6GCYJ122	CHIP 1.2K	1	
R4035		ERDS2TJ101	100	1	
R4036		ERDS2TJ154	150K	1	
R4037		ERJ6GCYJ472	CHIP 4.7K	1	
R4038		ERJ6GCYJ223	CHIP 22K	1	
R4040		ERJ6GCYJ8R2	CHIP 8.2	1	
			CAPACITORS		
C4001		ECEA1AK101	ELECTROLYTIC 10V 100	1	
C4002		ECUX1H122KBN	CERAMIC 50V 1200P	1	
C4003		ECEA1HKL010	ELECTROLYTIC 50V 1	1	
C4004		ECUX1H101JN	CERAMIC 50V 100P	1	
C4005		ECEA0JK470	ELECTROLYTIC 6.3V 47	1	
C4006		ECQB1H333JH	MYLAR 50V 0.033	1	
C4007		ECUX1H822KBN	CERAMIC 50V 8200P	1	
C4008		ECEA0JK220	ELECTROLYTIC 6.3V 22	1	
C4009		ECEA1HK010	ELECTROLYTIC 50V 1	1	
C4010		ECUX1H271JCM	CERAMIC 50V 270P	1	
C4011		ECEA0JK470	ELECTROLYTIC 6.3V 47	1	
C4012		ECEA0JK220	ELECTROLYTIC 6.3V 22	1	
C4013		ECUX1E104ZFN	CERAMIC 25V 0.01	1	
C4014		ECEA0JK470	ELECTROLYTIC 6.3V 47	1	
C4015		ECEA1VKS4R7	ELECTROLYTIC 35V 4.7	1	
C4016		ECQB1H273JH	MYLAR 50V 0.027	1	
C4017		ECEA1HK010	ELECTROLYTIC 50V 1	1	
C4018		ECEA1AK330	ELECTROLYTIC 10V 33	1	
C4019		ECUX1H472KBN	CERAMIC 50V 4700P	1	
C4020		ECRHA09ON11		1	
C4021		ECQP1152JZ	MYLAR 100V 1500P	1	
C4022		ECEA1AK101	ELECTROLYTIC 10V 100	1	
C4023		ECUX1H153KBM	CERAMIC 50V 0.015	1	
C4024		ECUX1H22KBN	CERAMIC 50V 2200P	1	
C4025		ECEA1HK2R2	ELECTROLYTIC 50V 2.2	1	
C4026		ECEA0GK470	ELECTROLYTIC 4V 47	1	
C4028		ECEA1HK2R2	ELECTROLYTIC 50V 2.2	1	
C4029		ECQV1H154JZ	MYLAR 50V 0.15	1	
C4030		ECEA0JK101	ELECTROLYTIC 6.3V 100	1	
C4031		ECEA0JK101	ELECTROLYTIC 6.3V 100	1	
C4032		ECQB1H682JH	MYLAR 50V 6800P	1	
C4033		ECWM1H472JZ	MYLAR 50V 4700P	1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
			COILS		
L4001		VLQEL05F101K	100uH	1	
L4002		VLQEL05F101K	100uH	1	
L4003		ELTMR822JB	8.2mH	1	
L4004		ELTMR153KB	15mH	1	
			TRANSFORMERS		
T4001		EIQ7QE002B		1	
			CONNECTORS		
P4001		VJP1598T	5P	1	
P4002		VJP1598T	5P	1	
P4003		VJP1596T	3P	1	
P4004		VJP1600T	7P	1	
			VARIABLE RESISTORS		
VR4001		EVMLGGA00B23	2K	1	
	■	VEP06311A	OPERATION (I) C.B.A.		
			DIODES		
D6101		MA165		1	
D6102		MA165		1	
D6103		MA165		1	
D6104		MA165		1	
D6105		MA165		1	
D6106		MA165		1	
			RESISTORS		
R6101		ERDS2TJ561	560	1	
R6102		ERDS2TJ561	560	1	
R6103		ERDS2TJ561	560	1	
R6104		ERDS2TJ561	560	1	
R6105		ERDS2TJ561	560	1	
			SWITCHES		
SW6101		EVQQL407K		1	
SW6102		EVQQL407K		1	
SW6103		EVQQL407K		1	
SW6104		EVQQL407K		1	
SW6105		EVQQL407K		1	
SW6106		EVQQL407K		1	
			MISCELLANEOU		
		KL02	LED SPACER	2	
	■	VEP06312A	OPERATION (II) C.B.A.		
			DIODES		
D6201		MA165		1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
D6202		EBR3902S	LED	1	
D6203		EBR3902S	LED	1	
			RESISTOR		
R6201		ERDS2TJ561	560	1	
			SWITCHES		
SW6201		EVQQSB04B		1	
SW6202		EVQQSB04B		1	
			CONNECTOR		
P6201		VJP1247T	7P	1	
	■	VEP06314A	OPERATION (III) C.B.A.		
			DIODES		
D6501		MA165		1	
D6502		MA165		1	
D6503		MA165		1	
D6504		MA165		1	
D6505		MA165		1	
			VARIABLE RESISTOR		
VR6501		EVLBYAA00B15	TRACKING VR 100K	1	
			SWITCHES		
SW6501		EVQQSB04B		1	
SW6502		EVQQSB04B		1	
SW6503		EVQQSB04B		1	
SW6504		EVQQSB04B		1	
SW6505		EVQQSB04B		1	
			CONNECTORS		
P6501		VJP1606T		1	
				1	
	■	VJB00E39	EJECT C.B.		
			DIODES		
D6401		MA165		1	
			SWITCHES		
SW6401		EVQQSB04B		1	
	■	VJB00G18	FUSE CONNECTION C.B.		

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
			CONNECTORS		
P1508		VJP1242R	2P	1	
P1509		VJP1232R	5P	1	
P1510		VJP1230T	3P	1	
P1511		VJP1229T	2P	1	
			MISCELLANEOU		
		TJC6320	FUSE HOLDER	2	<!>
	■	VJB26042	START/STOP C.B.		
			SWITCH		
		VSP0148		2	
	■	VJB00F70	MECHANISM CONNECTION C.B.		
			PHOTO INTERRUPTER		
Q1501		ON2160		1	
			CONNECTORS		
P1501		VJS1702	10P	1	
P1502		VJP1229T	2P	1	
P1504		VJP1595T	2P	1	
P1505		VJP1595R	2P	1	
P1506		VJP1229R	2P	1	
	■	VJB00F71	FE HEAD C.B.		
			TRANSISTOR		
Q1504		2SC2603		1	
			RESISTOR		
R1501		ERDS2TJ333	3.3K	1	
			CAPACITORS		
C1501		ECKF1H4722F	CERAMIC 50V 4700	1	
C1502		ECEA1CKS100	ELECTROLYTIC 16V 10	1	
C1503		ECQV1H333JZ	MYLAR 50V 0.033	1	
C1504		VCYE1C103MR1	CEMICONDUCTOR 16V 0.01	1	
			COIL		
L1502		VLQEL05F221K	220uH	1	
			TRANSFORMER		
T1501		VTD0014B		1	
	■	VJB00F66	REMOTE CONTROL JACK C.B.		

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
			JACK		
J1501		VJJ0125		1	
			DIODE		
D1501		MA4100		1	
			COIL		
L1501		VLQEL05F221K	220uH	1	
			CONNECTOR		
P1507		VJP1230T	3P	1	

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks

3. VW-KM3E Mechanical Replacement Parts List

Note: 1.* Be sure to make your orders of replacement parts according to this list.
2. IMPORTANT SAFETY NOTICE
Components identified with the mark <!> have the special characteristics for safety. When replacing any of these components, use only the same type.

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
1		VKM0620	Top Case	1	
2		VKM0597	Bottom Case	1	
3		VMA6773	Support Angle	1	
4		VQF1633	Fan Bag Kit	1	
5		VPG2461	Packing Case	1	
6		VPN1390	Pad	1	
7		VEK2645	14pin Multi Cable	1	
8		VEJ0472	Input Terminal	1	

4. VW-KM3E Electrical Replacement Parts List

Note:1.* Be sure to make your orders of replacement parts according to this list.
2.IMPORTANT SAFETY NOTICE
Components identified with the mark <!> have the special characteristics for safety. When replacing any of these components,use only the same type.
3.Unless otherwise specified,
All resistors are in OHMS ,K=1,000 OHMS. All capacitors are in MICRO-FARADS(uf),P=uuF.
4.The P.C.Board units marked width'■'show below the main assembled parts.

Ref.No.		Part No.	Part Name & Description	Pcs	Remarks
			Printed Circuit Board		
			Assembly		
		VEP23041B	Main C.B.A.	1	
		VJB20197	Micro SW C.B.	1	
		VEJ0472	Input Terminal	1	
			Regulator IC		
RG301		AN78L09		1	
			Transistors		
Q301		2SD636		1	(Q,R,S)
Q302		2SC2206		1	(A,B,C)
Q303		2SB641		1	(Q,R,S)
Q304,305		2SD636		2	(Q,R,S)
Q801		2SD636		1	(Q,R,S)
Q802		2SC2206		1	(A,B,C)
Q803		2SD636		1	(Q,R,S)
			Diode		
D301		MA165		1	
			Resistors		
R301		ERDS2TJ680	68	1	
R302		ERDS2TJ563	56K	1	
R303		ERDS2TJ273	27K	1	
R304-306		ERDS2TJ102	1K	3	
R307		ERDS2TJ563	56K	1	
R308		ERDS2TJ153	15K	1	
R309		ERDS2TJ222	2.2K	1	
R310		ERDS2TJ152	1.5K	1	
R311		ERDS2TJ392	3.9K	1	
R312		ERDS2TJ102	1K	1	
R313		ERDS2TJ471	470	1	
R314		ERDS2TJ105	1M	1	
R315		ERDS2TJ683	68K	1	
R316		ERDS2TJ273	27K	1	
R317		ERDS2TJ102	1K	1	
R318		ERDS2TJ680	68	1	
R801		ERDS2TJ563	56K	1	
R802		ERDS2TJ273	27K	1	
R803-805		ERDS2TJ102	1K	3	
R806,807		ERDS2TJ563	56K	2	
R808		ERDS2TJ821	820	1	
R809		ERDS2TJ102	1K	1	
R810		ERDS2TJ271	270	1	
R811		ERDS2TJ563	56K	1	
R812		ERDS2TJ273	27K	1	
R813		ERDS2TJ102	1K	1	
R814		ERDS2TJ680	68	1	
			Capacitors		
C301		ECEA0JK220	Electrolytic 6.3V 22	1	
C302		ECKF1H103ZF	Ceramic 50V 0.01	1	
C303		ECEA1CK470	Electrolytic 16V 47	1	
C304		ECEA0JK470	Electrolytic 6.3V 47	1	
C305		ECEA1CK100	Electrolytic 16V 10	1	
C306		ECQV1H334JZ	Mylar 50V 0.33	1	
C307		ECQV1H104JZ	Mylar 50V 0.1	1	
C801-805		ECKF1H103ZF	Ceramic 50V 0.01	5	
C806		ECEA1CK470	Electrolytic 16V 47	1	
			Coils		
L301		VLQEL05F101K	100uH	1	
L801		VLQEL05F101K	100uH	1	
			Filters		
FL301		ELB4R009	(Y,L.P.F)	1	
FL801		ELB4Q018	(C,B.P.F)	1	
			Connectors		
P301		VJP1229T	2P	1	
P302		VJP1231T	4P	1	
P303		VJP1230T	3P	1	
P304		VJP1231T	4P	1	
P305,306		VJP1230T	3P	2	